

ILLUMINACE HO | OUTDOOR




PROJECT: _____

DISTRIBUTOR: _____

CONTRACTOR: _____

TYPE _____

COMMENTS _____

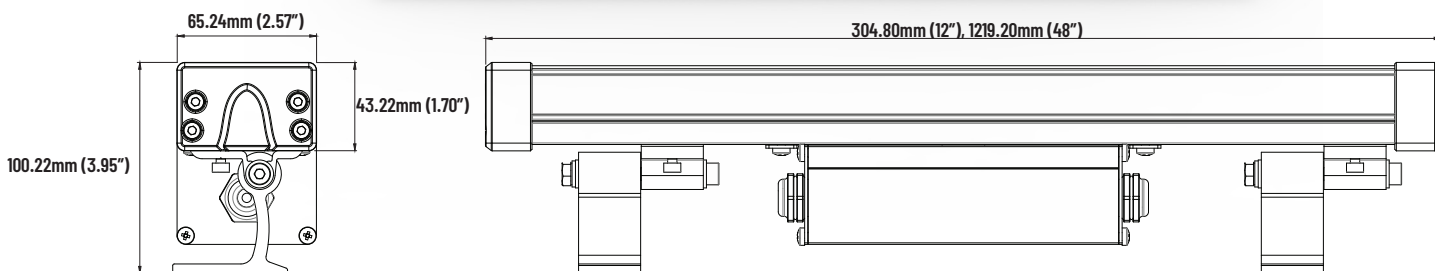

FEATURES

- PLUG AND PLAY
- SINGLE BIN
- MULTIPLE BEAM ANGLE
- DIMS ON/OFF, 0-10v

PHYSICAL

DIMENSIONS	65.24mm (2.57") WIDTH * 100.22mm (3.95") HEIGHT
MATERIALS	ALUMINUM ALLOY SHELL + TEMPERED GLASS COVER
OPERATING TEMPERATURE	-40°F (-40°C) to 131°F (55°C)
INPUT VOLTAGE	120v - 277v AC
IP RATING	IP67 OUTDOOR

ORDERING INFORMATION

PRODUCT	WATTAGE	LENGTH	CCT	OPTIC	LENS	MOUNTING
ILA	XXW	XFT	XXK	XXXX	XXXX	XXX
ILLUMINACE	15W = 15w/FT 20W = 20w/FT	1 = 1FT 4 = 4FT	27K = 2700K 30K = 3000K 35K = 3500K 40K = 4000K RGBW = RGB3K*	6 = 6° 8 = 8° 10 = 10° 12 = 12° 15 = 15°* 30 = 30°* 45 = 45°* 60 = 60°* 90 = 90°	SD = STANDARD HC = HONEYCOMB SHLD = SHIELD	PVT = PIVOT CLIPS

*RGBW CAN BE PAIRED WITH THESE OPTICS

ELECTRICAL

OUTPUT	LENGTH	CCT (CORRELATED COLOR TEMPERATURE)				RGBW	WATTAGE	MAX RUN			INPUT VOLTAGE
		2700K	3000K	3500K	4000K			120v	220v	277v	
~1500LM/FT	1FT	1440	1527	1548	1575	690	15w	60'	100'	140'	120v-277v
	4FT	5832	6184	6269	6379	2795	60w				
~2000LM/FT	1FT	1920	2036	2064	2100	920	20w	40'	75'	100'	120v-277v
	4FT	7776	8246	8359	8505	3726	80w				

PERFORMANCE

CRI	90+
WARRANTY	5 YEARS
DIMMING	ON/OFF, 0-10v