

ILLUMINACE HO | OUTDOOR




PROJECT: _____

DISTRIBUTOR: _____

CONTRACTOR: _____

TYPE _____

COMMENTS _____

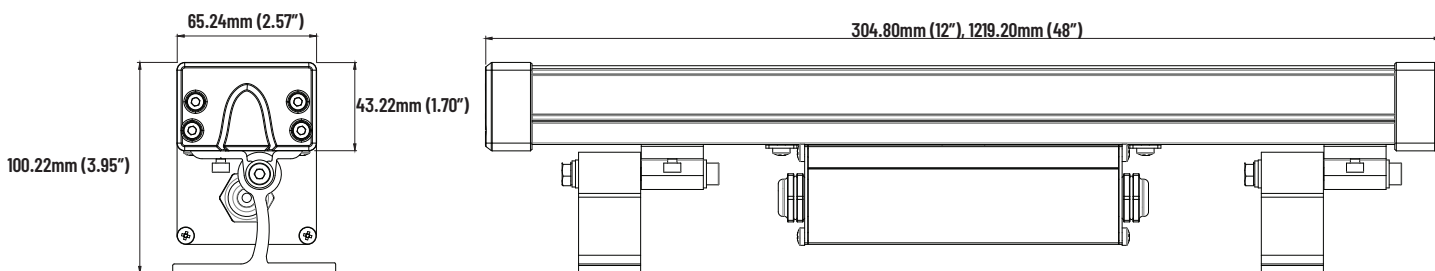

FEATURES

- PLUG AND PLAY
- SINGLE BIN
- MULTIPLE BEAM ANGLE
- DIMS ON/OFF, 0-10v, DMX

PHYSICAL

DIMENSIONS	65.24mm (2.57") WIDTH * 100.22mm (3.95") HEIGHT
MATERIALS	ALUMINUM ALLOY SHELL + TEMPERED GLASS COVER
OPERATING TEMPERATURE	-40°F (-40°C) to 131°F (55°C)
INPUT VOLTAGE	120V - 277V AC
IP RATING	IP67 OUTDOOR
FINISH	BLACK

ORDERING INFORMATION

PRODUCT	WATTAGE	LENGTH	CCT	OPTIC	LENS	MOUNTING
ILA	XXW	XFT	XX	XXXX	XXXX	XXX
ILLUMINACE	15W = 15w/FT 20W = 20w/FT	1 = 1FT 4 = 4FT	27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K RGBW = RGB3K*	6 = 6° 8 = 8° 10 = 10° 12 = 12° 15 = 15°* 30 = 30°* 45 = 45°* 60 = 60°* 90 = 90°	SD = STANDARD HC = HONEYCOMB SDS = STANDARD W/SHIELD HCS = HONEYCOMB W/SHIELD ** SHIELD IS EXTERNAL BUT NOT DETACHABLE**	3SO = 3" STAND OFFS

*RGBW CAN BE PAIRED WITH THESE OPTICS

ELECTRICAL

OUTPUT	LENGTH	CCT (CORRELATED COLOR TEMPERATURE)				RGBW	WATTAGE	MAX RUN			INPUT VOLTAGE
		2700K	3000K	3500K	4000K			120v	220v	277v	
~1500LM/FT	1FT	1440	1527	1548	1575	690	15W	60'	100'	140'	120V-277V
	4FT	5832	6184	6269	6379	2795	60W				
~2000LM/FT	1FT	1920	2036	2064	2100	920	20W	40'	75'	100'	120V-277V
	4FT	7776	8246	8359	8505	3726	80W				

PERFORMANCE

CRI	90+
WARRANTY	5 YEARS
DIMMING	ON/OFF, 0-10v, DMX

ACCESSORIES

ILA-AA-5W-LEAD-10FT	5 WIRE 10FT LEADER CABLE FEMALE IP68 BARREL CONNECTOR TO BARE WIRE
ILA-AA-5W-JUMP-4FT	5 WIRE 4FT IP68 JUMPER CABLE
ILA-AA-5W-JUMP-1FT	5 WIRE 1FT IP68 JUMPER CABLE
ILA-AA-5W-EC	5 WIRE SINGLE END CAP FOR ILLUMINACE
ILA-AA-B-1FT-DR-A-LOUVER	BLACK 1FT DOUBLE ROW ASYMMETRIC LOUVER
ILA-AA-B-1FT-DR-SD-LOUVER	BLACK 1FT DOUBLE ROW STANDARD LOUVER
ILA-AA-B-4FT-DR-A-LOUVER	BLACK 4FT DOUBLE ROW ASYMMETRIC LOUVER
ILA-AA-B-4FT-DR-SD-LOUVER	BLACK 4FT DOUBLE ROW STANDARD LOUVER
ILA-AA-B-12SO	PAIR OF BLACK 12" STAND OFFS
ILA-AA-B-18SO	PAIR OF BLACK 18" STAND OFFS
ILA-AA-B-6SO	PAIR OF BLACK 6" STAND OFFS