

ILLUMINACE SO | OUTDOOR




PROJECT: _____

DISTRIBUTOR: _____

CONTRACTOR: _____

TYPE _____

COMMENTS _____

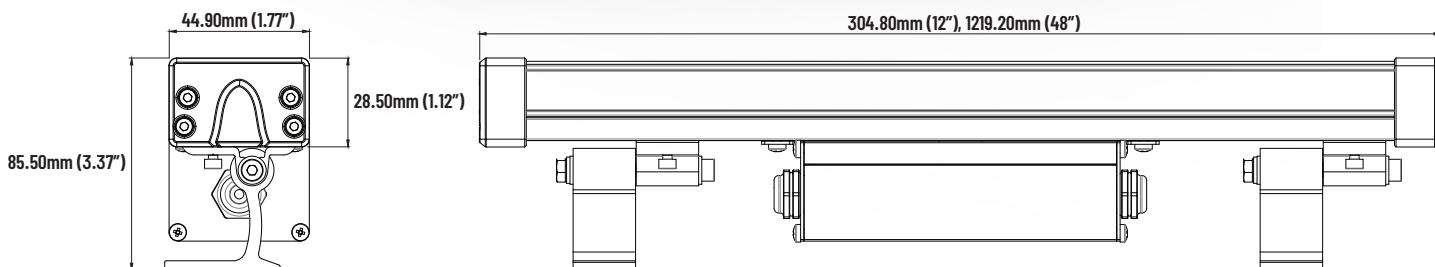

FEATURES

- PLUG AND PLAY
- SINGLE BIN
- MULTIPLE BEAM ANGLE
- DIMS ON/OFF, 0-10v

PHYSICAL

DIMENSIONS	44.90mm (1.77") WIDTH * 85.50mm (3.37") HEIGHT
MATERIALS	ALUMINUM ALLOY SHELL + TEMPERED GLASS COVER
OPERATING TEMPERATURE	-40°F (-40°C) to 131°F (55°C)
INPUT VOLTAGE	120v - 277v AC
IP RATING	IP67 OUTDOOR

ORDERING INFORMATION

PRODUCT	WATTAGE	LENGTH	CCT	OPTIC	LENS	MOUNTING
ILA	XXW	XFT	XKK	XXXX	XXXX	XXX
ILLUMINACE	5W = 5w/FT 10W = 10w/FT	1 = 1FT 4 = 4FT	27K = 2700K 30K = 3000K 35K = 3500K 40K = 4000K RGBW = RGB3K*	6 = 6° 8 = 8° 10 = 10° 12 = 12° 15 = 15°* 30 = 30°* 45 = 45°* 60 = 60°* 90 = 90°	SD = STANDARD HC = HONEYCOMB SHLD = SHIELD	PVT = PIVOT CLIPS

*RGBW CAN BE PAIRED WITH THESE OPTICS

ELECTRICAL

OUTPUT	LENGTH	CCT (CORRELATED COLOR TEMPERATURE)				RGBW	WATTAGE	MAX RUN			INPUT VOLTAGE
		2700K	3000K	3500K	4000K			120v	220v	277v	
~500LM/FT	1FT	480	509	516	525	230	5w	160'	205'	260'	120v-277v
	4FT	1944	2061	2090	2126	932	20w				
~1000LM/FT	1FT	960	1018	1032	1050	460	10w	90'	150'	190'	120v-277v
	4FT	3888	4123	4180	4253	1863	40w				

PERFORMANCE

CRI	90+
WARRANTY	5 YEARS
DIMMING	ON/OFF, 0-10v