

ACE-L | 277V LINE VOLTAGE STATIC WHITE OUTDOOR




PROJECT:

DISTRIBUTOR:

CONTRACTOR:

TYPE

COMMENTS

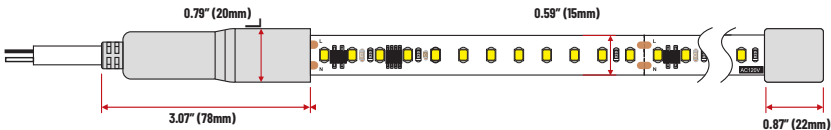

SPECS

Dimensions	20mm (0.79") WIDTH * 6mm (0.24") HEIGHT
Operating Temperature	-4°F (-20°C) TO 113°F (45°C)
IP rating	IP67
Mounting	Profiles
Presoldered components	10FT lead and end cap
Profile compatibility	Profiles on this spec sheet
Beam angle	120°
CRI	95+
Binning	Single
Warranty	5 years
Cuttable	Not field cuttable

ORDERING INFORMATION

PRODUCT		LM/FT		CCT		IP		LENGTH
ACE-L-277	-	XXX	-	XXK	-	IP67	-	XXFT
ACE L 277V SERIES		300 = 300LM/FT 500 = 500LM/FT		27K = 2700K 30K = 3000K 35K = 3500K 40K = 4000K		IP67 = OUTDOOR		PROVIDE LENGTH

ACE-L | 277V LINE VOLTAGE STATIC WHITE OUTDOOR



ELECTRICAL

OUTPUT	CCT				MAX RUN	WATTAGE	LM/ WATT	PRODUCTION INTERVALS	INPUT VOLTAGE
	2700K	3000K	3500K	4000K					
~300 LM/FT	288	300	311	319	200'	3.0W/FT	100	3.93" (100mm)	120V AC
~500 LM/FT	479	490	503	513	150'	5.0W/FT	98		

ACCESSORIES SOLD SEPARATELY BUT FACTORY INSTALLED

AA-L-2W-JUMP-CL	2 WIRE FACTORY INSTALLED CUSTOM LENGTH JUMP
-----------------	---

ACCESSORIES SOLD SEPARATELY

AA-L-MC	L SERIES SINGLE MOUNTING CLIP
AA-L-PC	L SERIES SINGLE PLASTIC CLIP
AA-L-PRO-4FT-AL	L SERIES 4FT ALUMINUM PROFILE
AA-L-PRO-4FT-PL	L SERIES 4FT PLASTIC PROFILE