

MOONLIGHT FACADE | OUTDOOR





PROJECT: _____

DISTRIBUTOR: _____

CONTRACTOR: _____

TYPE _____

COMMENTS _____

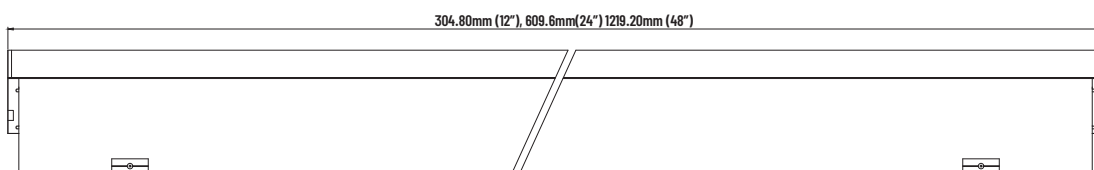

FEATURES

- PLUG AND PLAY
- DIMS ON/OFF, 0-10v
- SINGLE BIN

PHYSICAL

DIMENSIONS	30mm (1.18") WIDTH * 67mm (2.64") HEIGHT
MATERIALS	ALUMINUM ALLOY SHELL + TEMPERED GLASS COVER
OPERATING TEMPERATURE	-40°F (-40°C) to 131°F (55°C)
INPUT VOLTAGE	24v DC
IP RATING	IP67 OUTDOOR
BEAM ANGLE	120°

ORDERING INFORMATION

PRODUCT	LENGTH	CCT
MLF	X	XXK
MOONLIGHT FACADE	1 = 1FT 2 = 2FT 4 = 4FT	27K = 2700K 30K = 3000K 35K = 3500K 40K = 4000K RGBW = RGB3K

MOONLIGHT FACADE | OUTDOOR

ELECTRICAL

LENGTH	CCT (CORRELATED COLOR TEMPERATURE)				RGBW	WATTAGE	MAX RUN	INPUT VOLTAGE
	2700K	3000K	3500K	4000K				
1FT	209	210	210	212	134	3.5w		
2FT	418	420	421	424	268	7w	25'	24v DC
4FT	836	840	842	848	536	14w		

PERFORMANCE

CRI	90+
WARRANTY	5 YEARS
DIMMING	ON/OFF, 0-10v

ACCESSORIES (SOLD SEPARATELY)

MLF-AA-5W-LEAD-10FT	5 WIRE 10FT IP67 LEADER CABLE (FOR RGBW ONLY)
MLF-AA-5W-EC	5 WIRE SINGLE END CAP (FOR RGBW ONLY)
MLF-AA-2W-LEAD-10FT	2 WIRE 10FT IP67 LEADER CABLE (FOR STATIC WHITE ONLY)
MLF-AA-2W-EC	2 WIRE SINGLE END CAP (FOR STATIC WHITE ONLY)
MLF-AA-MC	SINGLE METAL CLIP (RECOMMENDED 2 CLIPS PER FIXTURE)
ACE-PWR-96W	96W 120v-347v DIMMABLE DRIVER