

ACE-N-H | NEON HORIZONTAL STATIC WHITE





PROJECT: _____

DISTRIBUTOR: _____

CONTRACTOR: _____

TYPE _____

COMMENTS _____

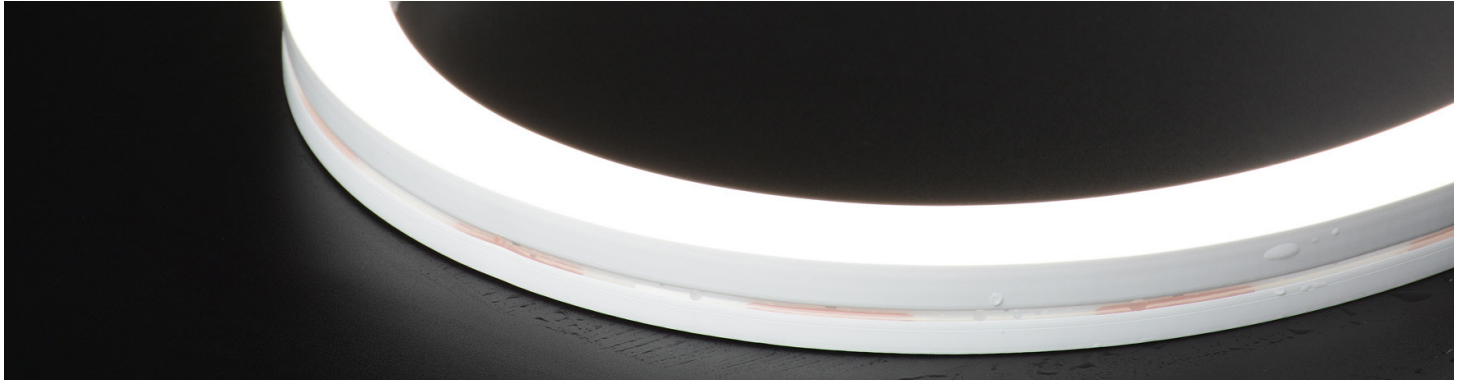

PHYSICAL

DIMENSIONS	16mm (0.63") WIDTH *15mm (0.59") HEIGHT
MINIMUM BENDING RADIUS	200mm (7.87")
BEND	HORIZONTAL BENDING
OPERATING TEMPERATURE	-13°F (-25°C) TO 113°F (45°C)
IP RATING	IP67
MOUNTING	CLIPS OR PROFILE
LEAD TYPE	LEAD SOLD SEPARATELY

ORDERING INFORMATION


PRODUCT	INTENSITY	FEED	CCT	IP	LENGTH
ACE-N-H	XXX	XX	XXK	IP67	XXFT
ACE NEON HORIZONTAL	200 = 200 LM/FT 300 = 300 LM/FT	EF = END FEED BF = BOTTOM FEED SLF = SIDE LEFT FEED SRF = SIDE RIGHT FEED	27K = 2700K 30K = 3000K 35K = 3500K 40K = 4000K	IP67 = OUTDOOR	1FT = 1 FOOT 4FT = 4 FEET 8FT = 8 FEET 12FT = 12 FEET

ACE-N-H | NEON HORIZONTAL STATIC WHITE


ELECTRICAL

OUTPUT	CCT (CORRELATED COLOR TEMPERATURE)				MAX RUN	PRODUCTION INTERVALS	WATTAGE	INPUT VOLTAGE
	2700K	3000K	3500K	4000K				
~200 LM/FT	195	204	198	223	30'	50mm (1.97")	3.0w/FT	24v DC
~300 LM/FT	279	293	284	320	20'		4.6w/FT	


FEED OPTIONS




END FEED

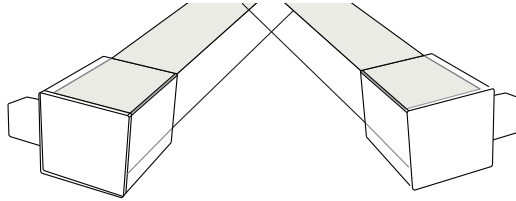

SIDE LEFT FEED



SIDE RIGHT FEED



BOTTOM FEED

PERFORMANCE

CRI	90+
LUMEN MAINTENANCE	50,000
BINNING	SINGLE
WARRANTY	5 YEARS

ACCESSORIES (SOLD SEPARATELY)

AA-N-2W-LEAD-6FT	2 WIRE 6FT IP68 LEADER CABLE (MRI SAFE)
AA-N-2W-LEAD-10FT	2 WIRE 10FT IP68 LEADER CABLE (MRI SAFE)
AA-N-2W-LEAD-30FT	2 WIRE 30FT IP68 LEADER CABLE (MRI SAFE)
AA-N-2W-LEAD-50FT	2 WIRE 50FT IP68 LEADER CABLE (MRI SAFE)
AA-N-2W-JUMP-1FT	2 WIRE 1FT IP68 JUMPER CABLE (MRI SAFE)
AA-N-2W-JUMP-4FT	2 WIRE 4FT IP68 JUMPER CABLE (MRI SAFE)
AA-N-MC	SINGLE NEON MOUNTING CLIP (NOT MRI SAFE)
AA-N-FLEX-PRO-3.28FT	3.28FT STAINLESS STEEL SERRATED FLEXIBLE PROFILE (NOT MRI SAFE)
AA-N-PRO-4FT	4FT ALUMINUM NEON PROFILE (MRI SAFE)
AA-N-H-HYBRID-PRO-3.28FT	3.28FT SEMI RIGID SERRATED HORIZONTAL BENDING PROFILE (MRI SAFE)
AA-N-2W-EC	2 WIRE SINGLE END CAP (MRI SAFE)