

# ACE-N-H | NEON HORIZONTAL COLOR TUNING




PROJECT: \_\_\_\_\_

DISTRIBUTOR: \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_

TYPE \_\_\_\_\_

COMMENTS \_\_\_\_\_



## PHYSICAL

<b>DIMENSIONS</b>	20mm (0.79") WIDTH *20mm (0.79") HEIGHT
<b>MINIMUM BENDING RADIUS</b>	200mm (7.87")
<b>BEND</b>	HORIZONTAL BENDING
<b>OPERATING TEMPERATURE</b>	-13°F (-25°C) TO 113°F (45°C)
<b>IP RATING</b>	IP67
<b>MOUNTING</b>	CLIPS OR PROFILE
<b>LEAD TYPE</b>	6FT LEAD SOLD SEPARATELY

## ORDERING INFORMATION

PRODUCT	INTENSITY	FEED	CCT	IP	LENGTH
ACE-N-H	XX	XX	X	IP67	XXFT
ACE NEON HORIZONTAL	130 = 130 LM/FT	EF = END FEED BF = BOTTOM FEED SLF = SIDE LEFT FEED SRF = SIDE RIGHT FEED	CT = COLOR TUNING 2700K-5700K	IP67 = OUTDOOR	1FT = 1 FOOT 4FT = 4 FEET 8FT = 8 FEET 12FT = 12 FEET


# ACE-N-H | NEON HORIZONTAL COLOR TUNING




## ELECTRICAL

OUTPUT	CCT (CORRELATED COLOR TEMPERATURE)			MAX RUN	PRODUCTION INTERVALS	WATTAGE	INPUT VOLTAGE
	2700K	5700K	FULL POWER				
~130 LM/FT	112	216	163	16'	50mm (1.97")	4.6w/FT	24v DC


## FEED OPTIONS




**END FEED**

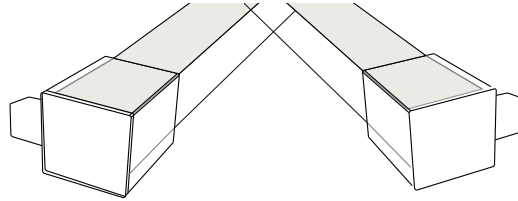

**SIDE LEFT FEED**



**SIDE RIGHT FEED**



**BOTTOM FEED**

## PERFORMANCE

CRI	90+
LUMEN MAINTENANCE	50,000
BINNING	SINGLE
WARRANTY	5 YEARS

## ACCESSORIES (SOLD SEPARATELY)

<b>AA-N-5W-LEAD-6FT</b>	5 WIRE 6FT IP68 LEADER CABLE (MRI SAFE)
<b>AA-N-5W-LEAD-10FT</b>	5 WIRE 10FT IP68 LEADER CABLE (MRI SAFE)
<b>AA-N-5W-LEAD-30FT</b>	5 WIRE 30FT IP68 LEADER CABLE (MRI SAFE)
<b>AA-N-5W-LEAD-50FT</b>	5 WIRE 50FT IP68 LEADER CABLE (MRI SAFE)
<b>AA-N-5W-JUMP-1FT</b>	5 WIRE 1FT IP68 JUMPER CABLE (MRI SAFE)
<b>AA-N-5W-JUMP-4FT</b>	5 WIRE 4FT IP68 JUMPER CABLE (MRI SAFE)
<b>AA-N20-MC</b>	20MM SINGLE NEON MOUNTING CLIP (NOT MRI SAFE)
<b>AA-N20-PRO-4FT</b>	4FT 20MM WIDE ALUMINUM NEON PROFILE (MRI SAFE)
<b>AA-N-5W-EC</b>	5 WIRE SINGLE END CAP (MRI SAFE)