

ACE-N-H | NEON HORIZONTAL RGBW




PROJECT: _____

DISTRIBUTOR: _____

CONTRACTOR: _____

TYPE _____

COMMENTS _____



PHYSICAL

DIMENSIONS	20mm (0.79") WIDTH *20mm (0.79") HEIGHT
MINIMUM BENDING RADIUS	200mm (7.87")
BEND	HORIZONTAL BENDING
OPERATING TEMPERATURE	-13°F (-25°C) TO 113°F (45°C)
IP RATING	IP67
MOUNTING	CLIPS OR PROFILE
LEAD TYPE	LEAD SOLD SEPARATELY

ORDERING INFORMATION


PRODUCT	INTENSITY	FEED	CCT	IP	LENGTH
ACE-N-H	XX	XX	X	IP67	XXFT
ACE NEON HORIZONTAL	130 = 130 LM/FT	EF = END FEED BF = BOTTOM FEED SLF = SIDE LEFT FEED SRF = SIDE RIGHT FEED	RGBW = RGB 3000K	IP67 = OUTDOOR	1FT = 1 FOOT 4FT = 4 FEET 8FT = 8 FEET 12FT = 12 FEET

ACE-N-H | NEON HORIZONTAL RGBW


ELECTRICAL

OUTPUT	CCT (CORRELATED COLOR TEMPERATURE)				MAX RUN	PRODUCTION INTERVALS	WATTAGE	INPUT VOLTAGE
	RED	GREEN	BLUE	3000K				
~130 LM/FT	630NM	530NM	470NM	126	16'	62.50mm (2.46")	4.6w/FT	24v DC

FEED OPTIONS




END FEED

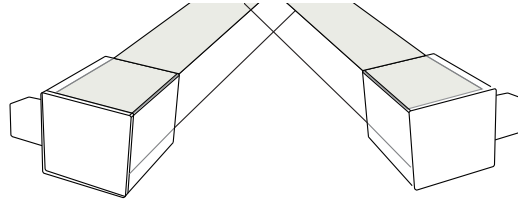

SIDE LEFT FEED

SIDE RIGHT FEED



BOTTOM FEED

PERFORMANCE

CRI	90+
LUMEN MAINTENANCE	50,000
BINNING	SINGLE
WARRANTY	5 YEARS

ACCESSORIES (SOLD SEPARATELY)

AA-N-5W-LEAD-6FT	5 WIRE 6FT IP68 LEADER CABLE (MRI SAFE)
AA-N-5W-LEAD-10FT	5 WIRE 10FT IP68 LEADER CABLE (MRI SAFE)
AA-N-5W-LEAD-30FT	5 WIRE 30FT IP68 LEADER CABLE (MRI SAFE)
AA-N-5W-LEAD-50FT	5 WIRE 50FT IP68 LEADER CABLE (MRI SAFE)
AA-N-5W-JUMP-1FT	5 WIRE 1FT IP68 JUMPER CABLE (MRI SAFE)
AA-N-5W-JUMP-4FT	5 WIRE 4FT IP68 JUMPER CABLE (MRI SAFE)
AA-N20-MC	20MM SINGLE NEON MOUNTING CLIP (NOT MRI SAFE)
AA-N20-PRO-4FT	4FT 20MM WIDE ALUMINUM NEON PROFILE (MRI SAFE)
AA-N-5W-EC	5 WIRE SINGLE END CAP (MRI SAFE)