

ACE-N-M | MINI NEON RGBW OUTDOOR





PROJECT: _____

DISTRIBUTOR: _____

CONTRACTOR: _____

TYPE _____

COMMENTS _____

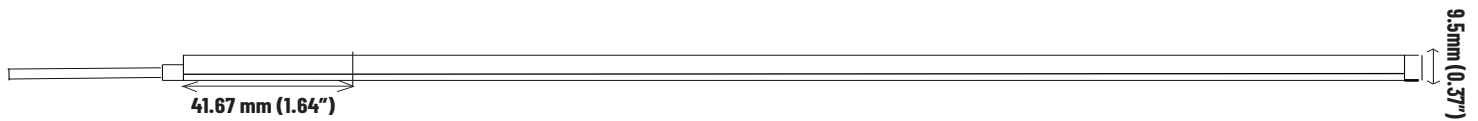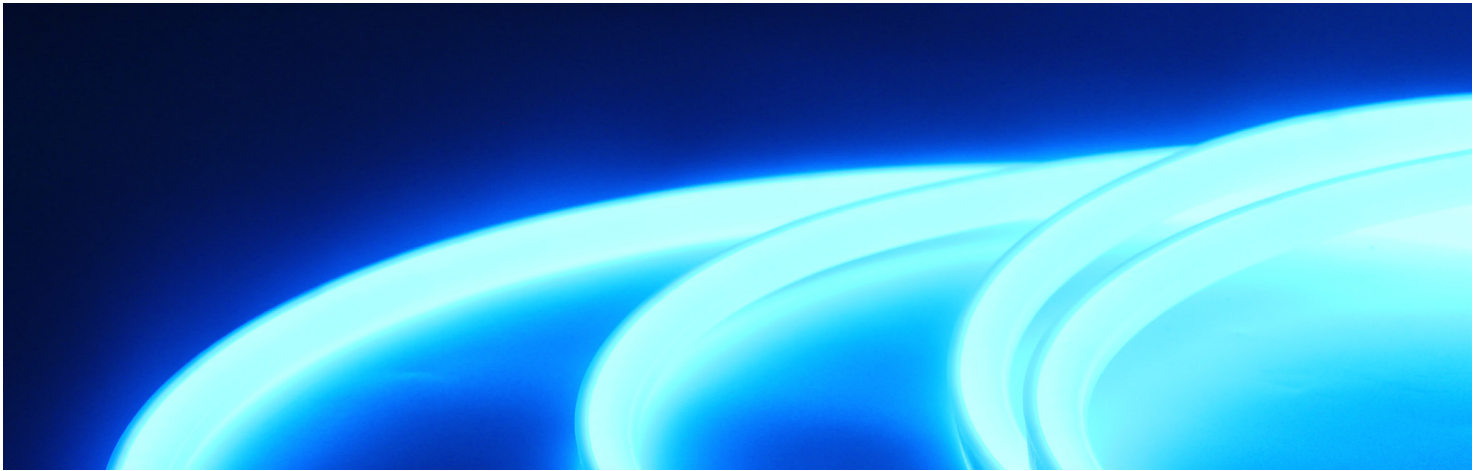

PHYSICAL

DIMENSIONS	10mm (0.39") WIDTH * 9.5mm (0.37") HEIGHT
OPERATING TEMPERATURE	-4°F (-20°C) TO 104°F (40°C)
IP RATING	IP67
MOUNTING	MOUNTING CLIPS OR PROFILE
LEAD TYPE	6FT LEAD SOLD SEPARATELY
BEAM ANGLE	140°

ORDERING INFORMATION

PRODUCT	INTENSITY	FEED	CCT	IP	LENGTH
ACE-N-M	XX	EF	RGBW	IP67	XXFT
ACE NEON MINI	30 = 30 LM/FT	EF = END FEED	RGBW = RGB 30K	IP67 = OUTDOOR	PROVIDE LENGTH

ACE-N-M | MINI NEON RGBW OUTDOOR



ELECTRICAL

OUTPUT	CCT (CORRELATED COLOR TEMPERATURE)				MAX RUN	WATTAGE	CUT INTERVALS	INPUT VOLTAGE
	RED	GREEN	BLUE	3000K				
~30 LM/FT	630NM	530NM	470NM	30	16'	3.1w/FT	41.67mm (1.64")	24v DC

PERFORMANCE

CRI	90+
LUMEN MAINTENANCE	50,000
BINNING	SINGLE
WARRANTY	5 YEARS

ACCESSORIES (SOLD SEPARATELY)

AA-N-M-5W-LEAD-6FT	5 WIRE 6FT NEON MINI LEADER CABLE (MRI SAFE)
AA-N-M-5W-JUMP-6IN	5 WIRE CABLE TO JUMP NEON MINI TO NEON MINI (MRI SAFE)
AA-N-M-MC	NEON MINI SINGLE METAL CLIP (MRI SAFE)
AA-N-M-PRO-4FT	4FT NEON MINI PROFILE (MRI SAFE)