

# ACE-N-0 | 360° STATIC WHITE NEON OUTDOOR




PROJECT: \_\_\_\_\_

DISTRIBUTOR: \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_

TYPE \_\_\_\_\_

COMMENTS \_\_\_\_\_

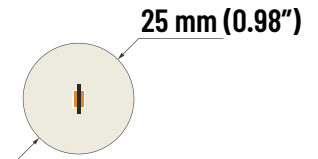

## PHYSICAL

PRODUCT DIAMETER	25mm (0.98")
MINIMUM BENDING RADIUS	200mm (7.87")
MATERIAL COLOR	WHITE SLEEVE
OPERATING TEMPERATURE	-13°F (-25°C) TO 113°F (45°C)
IP RATING	IP65
MOUNTING	VERTICAL SUSPENSION, HORIZONTAL SUSPENSION, VERTICAL PENDANT, ARC, HORIZONTAL SURFACE
LEAD TYPE	6FT LEAD SOLD SEPARATELY
BEAM ANGLE	360°

## ORDERING INFORMATION

PRODUCT	INTENSITY	FEED	CCT	IP	LENGTH
ACE-N-0	XXX	XX	XXK	IP65	XXFT
ACE NEON OMNI	160 = 160 LM/FT	EF = END FEED SF = SIDE FEED	27K = 2700K 30K = 3000K 35K = 3500K 40K = 4000K 50K = 5000K	IP65 = OUTDOOR	PROVIDE LENGTH


# ACE-N-0 | 360° STATIC WHITE NEON OUTDOOR




## ELECTRICAL

OUTPUT	CCT (CORRELATED COLOR TEMPERATURE)					MAX RUN	WATTAGE	INPUT VOLTAGE
	2700K	3000K	3500K	4000K	5000K			
~160 LM/FT	158	161	183	170	184	16'	3.0w/FT	24v DC

## FEED OPTIONS



SIDE FEED





END FEED


## PERFORMANCE

CRI	90+
LUMEN MAINTENANCE	50,000
BINNING	SINGLE
WARRANTY	5 YEARS


## ACCESSORIES (SOLD SEPARATELY)

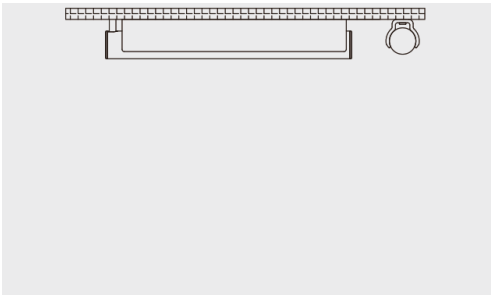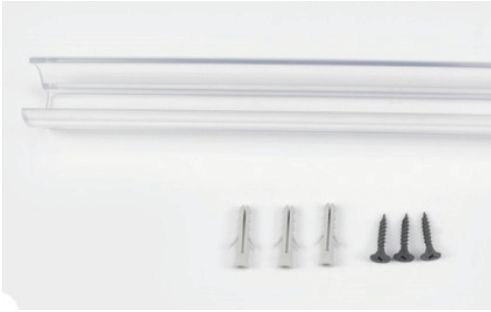


**AA-N-O-PRO-4FT**  
CLEAR 4FT SURFACE LENS FOR HORIZONTAL MOUNTING

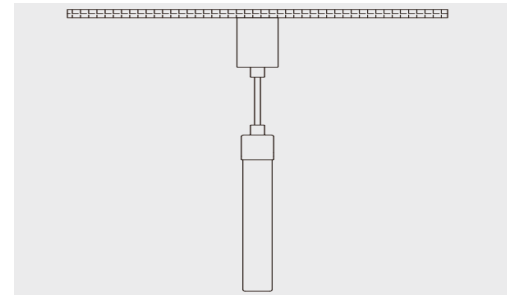

**AA-N-O-SP**  
SUSPENDED VERTICAL PENDANT ROPE

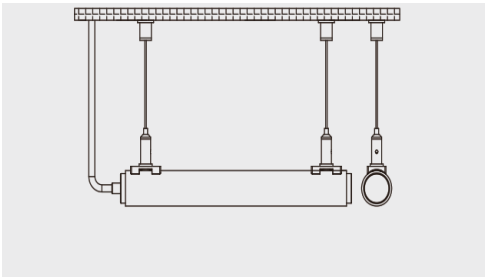


**AA-N-O-CT-4FT**  
CLEAR 4FT TUBE FOR HORIZONTAL MOUNTING

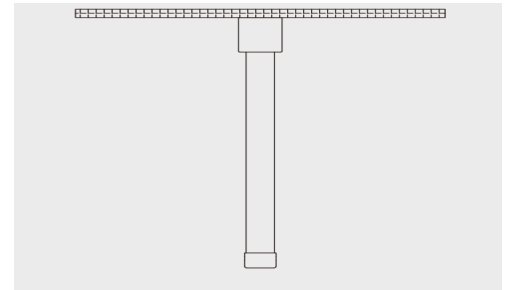



**AA-N-O-VS**  
VERTICAL SURFACE PENDANT

# ACE-N-O | 360° STATIC WHITE NEON OUTDOOR


## ACCESSORIES (SOLD SEPARATELY)

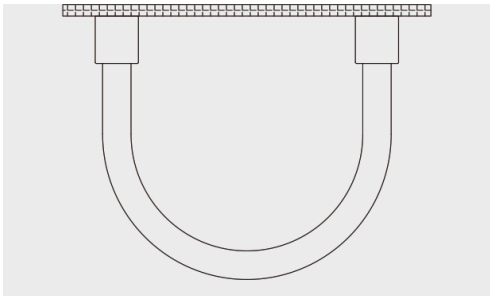


**AA-N-0-ARC**  
CEILING TO CEILING MOUNTING

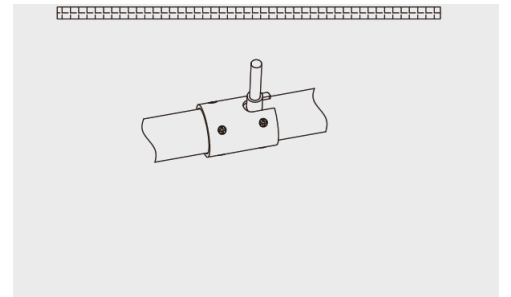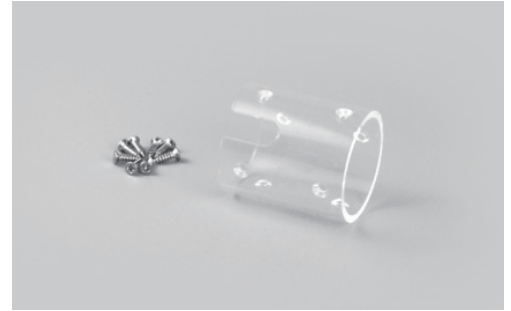

**AA-N-0-CJ**  
CLEAR JOINER

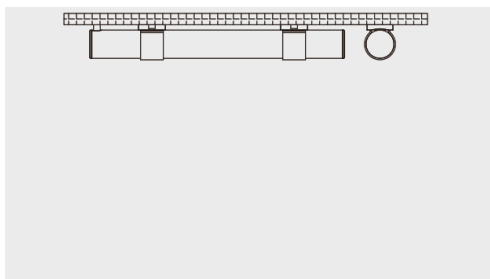

**AA-N-0-SC**  
SURFACE CLIP FOR HORIZONTAL MOUNTING

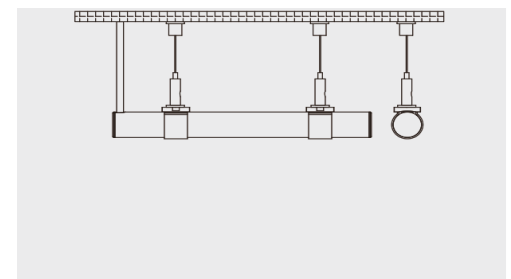

**AA-N-0-SK**  
SUSPENDED HORIZONTAL KIT