

ACE-N-O-B | 360° RGBW NEON OUTDOOR




PROJECT: _____

DISTRIBUTOR: _____

CONTRACTOR: _____

TYPE _____

COMMENTS _____

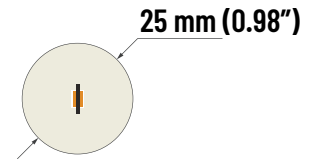

PHYSICAL

PRODUCT DIAMETER	25mm (0.98")
MINIMUM BENDING RADIUS	200mm (7.87")
MATERIAL COLOR	BLACK SLEEVE
OPERATING TEMPERATURE	-13°F (-25°C) TO 113°F (45°C)
IP RATING	IP65
MOUNTING	VERTICAL SUSPENSION, HORIZONTAL SUSPENSION, VERTICAL PENDANT, ARC, HORIZONTAL SURFACE
LEAD TYPE	6FT LEAD SOLD SEPARATELY
BEAM ANGLE	360°

ORDERING INFORMATION


PRODUCT	INTENSITY	FEED	CCT	IP	LENGTH
ACE-N-O-B	XXX	XX	XXK	IP65	XXFT
ACE NEON OMNI BLACK	16 = 16 LM/FT	EF = END FEED SF = SIDE FEED	RGBW = RGB 3000K	IP65 = OUTDOOR	PROVIDE LENGTH

ACE-N-O-B | 360° RGBW NEON OUTDOOR


ELECTRICAL

OUTPUT	CCT (CORRELATED COLOR TEMPERATURE)				MAX RUN	WATTAGE	INPUT VOLTAGE
	RED	GREEN	BLUE	3000K			
~16 LM/FT	630NM	530NM	470NM	30	16'	4.8w/FT	24v DC

FEED OPTIONS



SIDE FEED





END FEED


PERFORMANCE

CRI	90+
LUMEN MAINTENANCE	50,000
BINNING	SINGLE
WARRANTY	5 YEARS


ACCESSORIES (SOLD SEPARATELY)

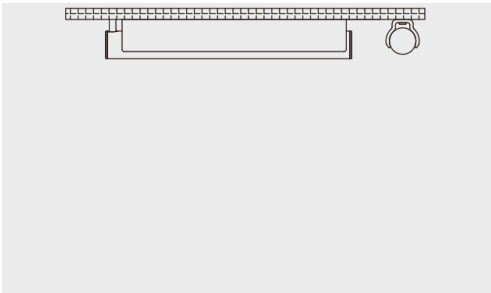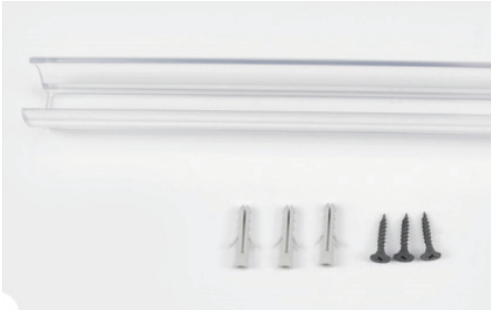


AA-N-O-PRO-4FT
CLEAR 4FT SURFACE LENS FOR HORIZONTAL MOUNTING

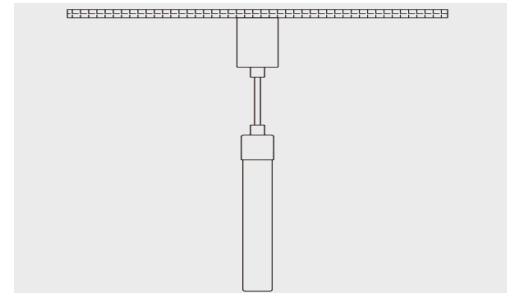

AA-N-O-SP
SUSPENDED VERTICAL PENDANT ROPE

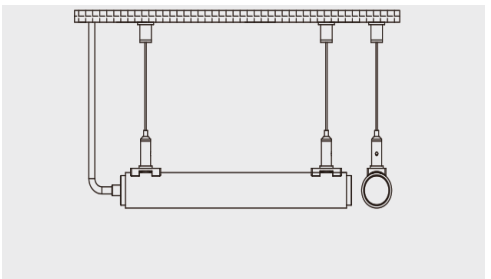


AA-N-O-CT-4FT
CLEAR 4FT TUBE FOR HORIZONTAL MOUNTING


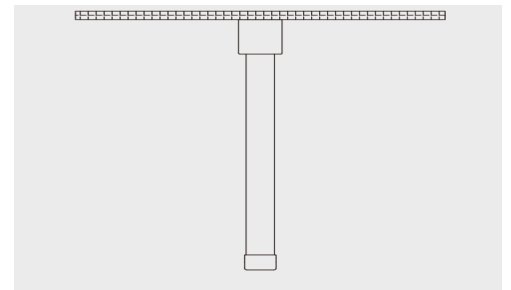


AA-N-O-VS
VERTICAL SURFACE PENDANT


ACCESSORIES (SOLD SEPARATELY)

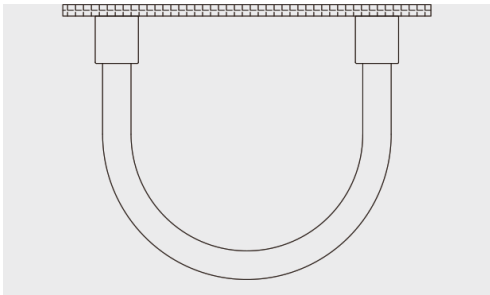


AA-N-0-ARC
CEILING TO CEILING MOUNTING

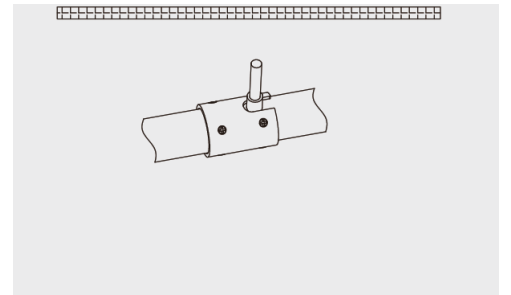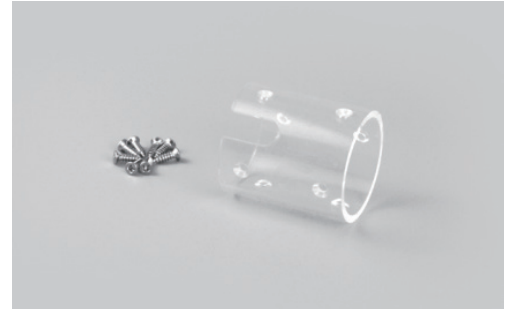

AA-N-0-CJ
CLEAR JOINER

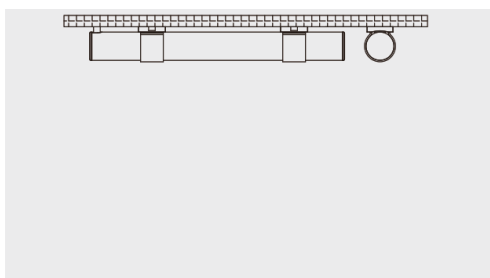

AA-N-0-SC
SURFACE CLIP FOR HORIZONTAL MOUNTING

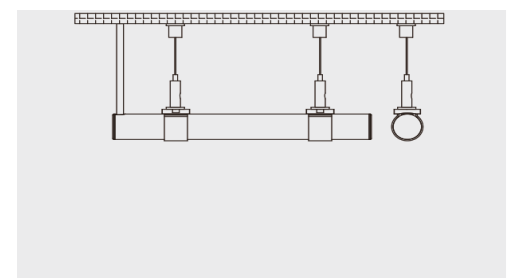

AA-N-0-SK
SUSPENDED HORIZONTAL KIT