

ACE-NV1-SW-IP67



Job name:
Distributor:
Contractor:
Type:

Dimension for Static White	0.63" WIDTH * 0.67" HEIGHT
Minimum bending radius	3.94"
Bend orientation	Vertical bending
Operating temperature	-40°F to 140°F
IP Rating	IP67 Outdoor
Lumen maintenance (L70)	50,000 hrs
Neon Lead	Sold separately (see below for lengths available)
Lumens available for Static White	200LM/FT, 300LM/FT, 400LM/FT
Static White Options	1800K, 2200K, 2400K, 2700K, 3000K, 3500K, 4000K, 5000K
Mounting available but sold separately	mounting clips or profiles
CRI	90+
Warranty	5 years
Input voltage	24V DC
Binning	Single
Field cuttable	No
Production intervals	every 1.97"
Beam Angles for Static White	120°
Dimming	ELV, TRIAC, 0-10V
Silicone finish	White
Material	Silicone




ACE-NV1-SW-IP67



ELECTRICAL										
WATTS	CCT								MAX CONT. RUN PER POWER FEED	TOTAL LOAD W/ 96W DRIVER
	1800K	2200K	2400K	2700K	3000K	3500K	4000K	5000K		
1.52W/FT	148LM/FT	164LM/FT	181LM/FT	196LM/FT	206LM/FT	211M/FT	222LM/FT	215LM/FT	30'	60'
3.1W/FT	214LM/FT	224LM/FT	230LM/FT	261LM/FT	271LM/FT	275LM/FT	278LM/FT	251LM/FT	20'	30'
4.6W/FT	272LM/FT	395LM/FT	410LM/FT	436LM/FT	451LM/FT	458LM/FT	462LM/FT	442LM/FT	16'	20''

DIMENSIONS

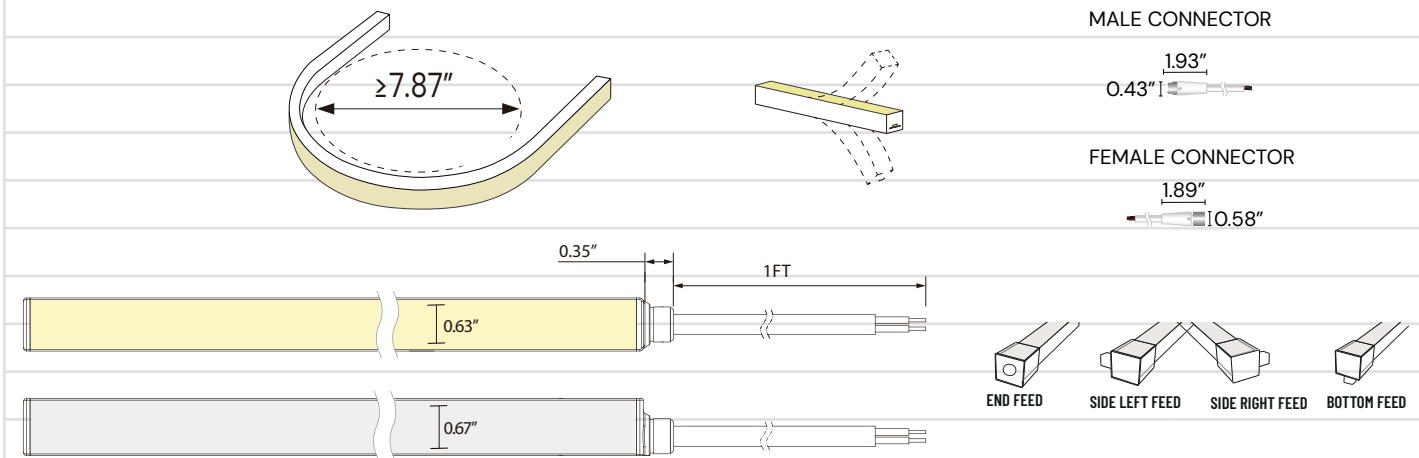

PART BUILDER

Select Product	Select Lumens	Select Feed	Select CCT	Select IP	Select Length
ACE NEON VERTICAL 1	200 = 200LM/FT	EF = END FEED	18K = 1800K	IP67	CLXX = CUSTOM LENGTH
	300 = 300LM/FT	BF = BOTTOM FEED	24K = 2400K		
	400 = 400LM/FT	SLF = SIDE LEFT FEED	27K = 2700K		
		SRF = SIDE RIGHT FEED	30K = 3000K		
			35K = 3500K		
			40K = 4000K		
			50K = 5000K		

FINALIZED PART NUMBER

A-NV1 - XO0 - XX - XXK - IP67 - CLXX

rev 01/26

© 2026 Ace Illuminations. All rights reserved.
Specifications and content subject to change without notice. Protected by international copyright laws.
info@ace illuminations.com | 702.960.4249

cont. on 2

ACE-NV1-SW-IP67



ACCESSORIES (sold separately)

LEADER CABLE: (connects to tape)

AA-N1-2W-LEAD-10FT ACE ACCESSORIES IP67 NEON 1 SERIES SINGLE 2 WIRE 10FT BARE LEAD

AA-N1-2W-LEAD-30FT ACE ACCESSORIES IP67 NEON 1 SERIES SINGLE 2 WIRE 30FT BARE LEAD

AA-N1-2W-LEAD-50FT ACE ACCESSORIES IP67 NEON 1 SERIES SINGLE 2 WIRE 50FT BARE LEAD



JUMPER CABLE: (connects to tape to tape)

AA-N1-2W-JUMP-1FT ACE ACCESSORIES IP67 NEON 1 SERIES SINGLE 2 WIRE 1FT JUMPER CABLE

AA-N1-2W-JUMP-4FT ACE ACCESSORIES IP67 NEON 1 SERIES SINGLE 2 WIRE 4FT JUMPER CABLE




END CAP: (to terminate the end of a run)

AA-N1-2W-EC ACE ACCESSORIES IP67 NEON 1 SERIES SINGLE 2 WIRE END CAP




MOUNTING: (secure the item onto structure)


AA-N1-M-MC ACE ACCESSORIES NEON 1 SERIES IP67I SINGLE MOUNTING CLIP




AA-N1-PRO-4FT ACE ACCESSORIES NEON 1 SERIES 4FT PROFILE



AA-N1-PRO-DW-4FT ACE ACCESSORIES NEON 1 SERIES 4FT PROFILE MUD-IN DRYWALL



AA-N1-PRO-RC-4FT ACE ACCESSORIES NEON 1 SERIES 4FT PROFILE RECESSED




rev 01/26

© 2026 Ace Illuminations. All rights reserved.
Specifications and content subject to change without notice. Protected by international copyright laws.
info@ace illuminations.com | 702.960.4249

ACE-NV1-SW-IP67



ACCESSORIES (sold separately)

AA-N1-PRO-FLEX-4FT	ACE ACCESSORIES NEON 1 SERIES 4FT STAINLESS STEEL SERRATED FLEXIBLE PROFILE	
AA-NV1-PRO-HYBRID-4FT	ACE ACCESSORIES IP67 NEON 1 SERIES 4FT HYBRID NEON	
AA-N1- PRO-RW-4FT	ACE ACCESSORIES IP67 NEON 1 SERIES 4FT RACEWAY PROFILE	
POWER SUPPLIES:	(to power the basilisk)	
ACE-PWR-36W	ACE 36W CLASS 2 INDOOR & OUTDOOR POWER SUPPLY 120V-277V INPUT, 5 IN 1 DIMMING	
ACE-PWR-96W	ACE 96W CLASS 2 INDOOR & OUTDOOR POWER SUPPLY 120V-277V INPUT, 5 IN 1 DIMMING	
ACE-PWR-192W	ACE 192W CLASS 2 INDOOR & OUTDOOR POWER SUPPLY 120V-277V INPUT, 5 IN 1 DIMMING	

