

ACE-E-SW-IP20



LISTED

Job name:
Distributor:
Contractor:
Specifier:
Type:

TECHNICAL DATA	
Dimensions of IP20 tape	0.31" Width * 0.09" Height
Minimum bending radius	2.36"
Bend orientation	Horizontal
Flexible	Yes
Operating temperature	-4°F to 122°F
IP Rating	IP20 Indoor
Lumens available	350
Static white options	2700K, 3000K, 4000K, 5000K, 6000K
Mounting included	3M VHB
Mounting available but sold separately	clips
Power Lead	Pre-soldered 6' lead
CRI	90+
Warranty	5 years
Input voltage	24V DC
Diodes per ft	42
Field cuttable	Yes every 1.96"
Beam Angle	120°
Dimming	0-10V, ELV
L70	55,000+
Binning	Single



ACE-E-SW-IP20



ELECTRICAL							
OUTPUT WATTAGE	CCT					MAX CONT. RUN	TOTAL LOAD W/ 96W
	2700K	3000K	4000K	5000K	6000K		
~350LM/FT 2.93W/FT	323LM/FT	335LM/FT	353LM/FT	353LM/FT	289LM/FT	16'	32'

DIMENSIONS



PART BUILDER

Select Product		Select Lumens		Select CCT		Select IP Rating		Select Length
ACE E SERIES	-	350 = 350LM/FT	-	27K = 2700K	-	IP20	-	XXFT
				30K = 3000K				
				40K = 4000K				
				50K = 5000K				
				60K = 6000K				

FINALIZED PART NUMBER									
ACE-E	-	350	-	XXK	-	IP20	-	XXFT	



ACE-E-SW-IP20



ACCESSORIES (sold separately)

LEADER CABLE: (connects to tape)

AA-T-2W-LEAD-CL ACE ACCESSORIES TAPE **IP20** PRE-SOLDERED 20AWG 2 WIRE LEADER CABLE CUSTOM LENGTH

JUMPER CABLE: (connects tape to tape)

AA-T-2W-JUMP-CL ACE ACCESSORIES TAPE **IP20** PRE-SOLDERED 20AWG 2 WIRE JUMPER CABLE CUSTOM LENGTH

POWER SUPPLIES: (powers the tape)


ACE-PWR-36W ACE 36W CLASS 2 POWER SUPPLY 120V-277V INPUT, 5 IN 1 DIMMING

ACE-PWR-96W ACE 96W CLASS 2 POWER SUPPLY 120V-277V INPUT, 5 IN 1 DIMMING

ACE-PWR-192W ACE 192W CLASS 2 POWER SUPPLY 120V-277V INPUT, 5 IN 1 DIMMING

MOUNTING OPTIONS: (secure item onto structure)

AA-T-E-MC MOUNTING CLIP TO VERTICALLY MOUNT TAPE (ORDER 2 PER FOOT)

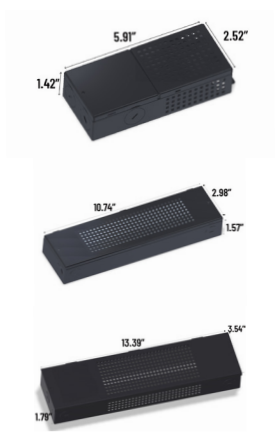

rev 09/26

© 2026 Ace Illuminations. All rights reserved.

Specifications and content subject to change without notice. Protected by international copyright laws.
info@aceilluminations.com | 702.960.4249

cont. on 3