

ACE-N-N-V-SW-IP67



Job name:
Distributor:
Contractor:
Type:

TECHNICAL DATA	
Dimension for Static White	0.39" WIDTH * 0.39" HEIGHT
Minimum bending radius	3.94"
Bend orientation	Vertical
Operating temperature	-13°F to 140°F
IP Rating	IP67 Outdoor
Lumen maintenance (L70)	50,000 hrs
Neon Lead	Sold separately
Lumens available for Static White	240LM/FT
Static White Options	2100K, 2400K, 2700K, 3000K, 3500K, 4000K, 5000K, 6500K
Mounting available (sold separately)	mounting clips and profiles
CRI	90+
Warranty	5 years
Input voltage	24V DC
Binning	Single
Field cuttable	No
Production intervals	every 1.41"
Beam Angle for Static White	120°
Dimming	ELV, TRIAC, 0-10V
Silicone finish	White
Material	Silicone




ACE-N-N-V-SW-IP67



ELECTRICAL										
WATTAGE	CCT								MAX CONT. RUN PER POWER FEED	TOTAL LOAD W/ 96W DRIVER
	2100K	2400K	2700K	3000K	3500K	4000K	5000K	6500K		
3.1 W/FT	196LM/FT	208LM/FT	226LM/FT	240LM/FT	219LM/FT	253LM/FT	253LM/FT	247LM/FT	13'	13'

DIMENSIONS

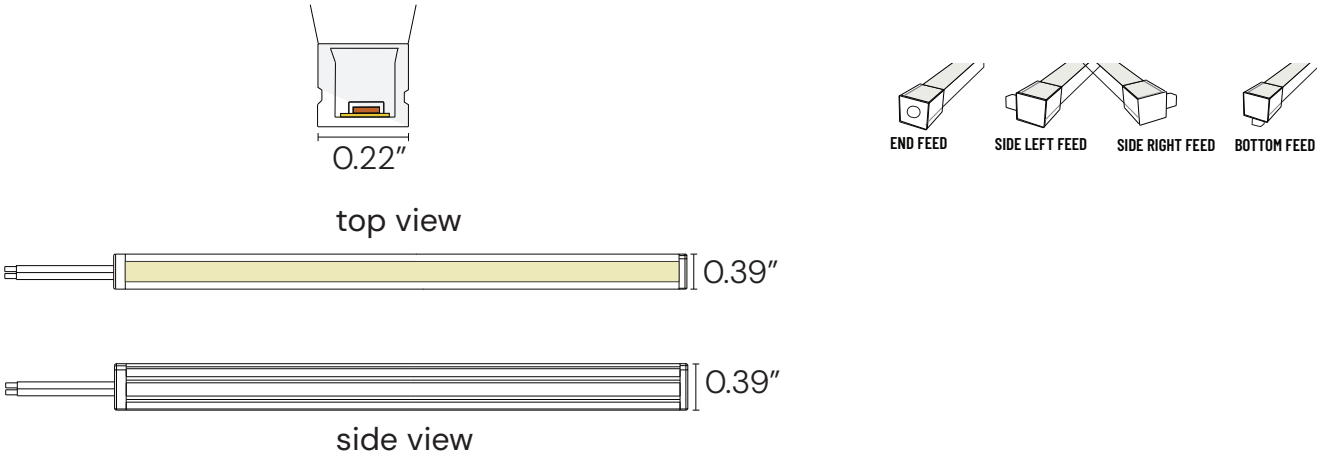

PART BUILDER

Select Product	Select Lumens	Select Feed	Select CCT	Select IP	Select Length
ACE NEON NANO VERTICAL SERIES	250 = 250LM/FT	EF = END FEED	21K = 2100K	IP67	CLXX = CUSTOM LENGTH
		BF = BOTTOM FEED	24K = 2400K		
		SLF = SIDE LEFT FEED	30K = 3000K		
		SRF = SIDE RIGHT FEED	35K = 3500K		
			40K = 4000K		
			50K = 5000K		
			65K = 6500K		

FINALIZED PART NUMBER							
ACE-N-N-V	-	250	-	XX	-	XXK	- IP67 - CLXX



ACE-N-N-V-SW-IP67



ACCESSORIES (sold separately)

LEADER CABLE:	(connects to neon)	
AA-N-N-2W-LEAD-10FT	ACE ACCESSORIES IP67 NEON NANO SINGLE 2 WIRE 10FT BARE LEAD	
JUMPER CABLE:	(connects neon to neon)	
AA-N-N-2W-JUMP-1FT	ACE ACCESSORIES IP67 NEON NANO SINGLE 2 WIRE 1FT JUMPER CABLE	
AA-N-N-2W-JUMP-4FT	ACE ACCESSORIES IP67 NEON NANO SINGLE 2 WIRE 4FT JUMPER CABLE	
END CAP:	(to terminate the end of a run)	
AA-N-N-2W-EC	ACE ACCESSORIES IP67 NEON NANO SINGLE 2 WIRE END CAP	
POWER SUPPLIES:	(to power the neon)	
ACE-PWR-36W	ACE 36W CLASS 2 INDOOR & OUTDOOR POWER SUPPLY 120V-277V INPUT, 5 IN 1 DIMMING	
ACE-PWR-96W	ACE 96W CLASS 2 INDOOR & OUTDOOR POWER SUPPLY 120V-277V INPUT, 5 IN 1 DIMMING	
ACE-PWR-192W	ACE 192W CLASS 2 INDOOR & OUTDOOR POWER SUPPLY 120V-277V INPUT, 5 IN 1 DIMMING	
MOUNTING:	(to secure item onto structure)	
AA-N-N-PRO-FLEX-4FT	ACE ACCESSORIES NEON NANO FLEXIBLE NEON 4FT PROFILE	
AA-N-N-PRO-4FT	ACE ACCESSORIES NEON NANO 4FT PROFILE	
AA-N-N-MC	ACE ACCESSORIES NEON NANO SINGLE MOUNTING CLIP	

