

ACE-PWR-DIM-100W



Job name:
Distributor:
Contractor:
Type:


TECHNICAL DATA	
Dimensions	4.13" Length * 2.13" Width * 2.05" Height
Operating temperature	-40°F to 140°F
IP Rating of driver	IP20
Weight	0.55LB
Humidity	20-95% RH, non-condensing
Vibration	10-500Hz, 2G
Standard Finish	White
Finishes available	Ivory and Black
Input voltage	120V
Frequency	60Hz
Power factor	0.99
Efficiency	91.0%
THD	≤10%
Max AC current	0.93A
Rated output voltage	24V
Rated output current	4.17A
Rated power	100W
Voltage tolerance	±0.5V
Application for use	Residential and commercial
Three way switching	Supports on/off control from two locations using the integrated dimmer and a separate compatible three-way switch.
Class	II & P
Protection	Short circuit, overload protection, overtemperature protection
Warranty	5 years



ACE-PWR-DIM-100W



DIMENSIONS

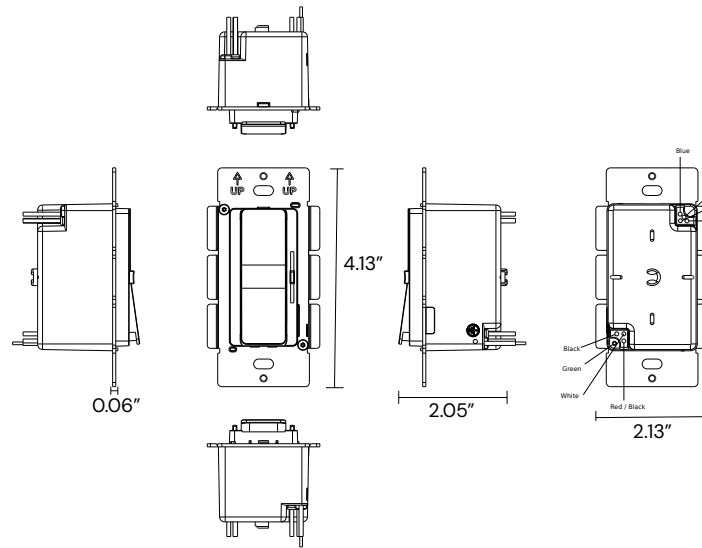


WIRING DIAGRAM

Input wires

L (Black), L1 (Red/Black), N (White), G (Green)

Output wires

V+ (Red), CW- (Gray/White), WW- (Yellow)

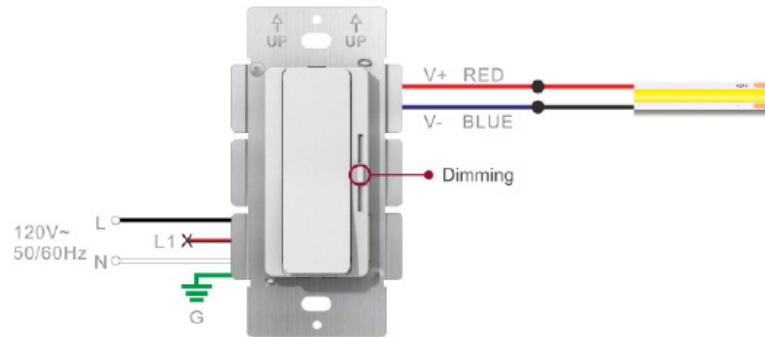

PART BUILDER

Select Product

ACE-PWR-DIM = ACE POWER DIM DRIVER COMBO

Select Channel

100W = 100 WATTS

FINALIZED PART NUMBER

ACE - PWR - DIM - 100W



rev 07/26

© 2026 Ace Illuminations. All rights reserved.

Specifications and content subject to change without notice. Protected by international copyright laws.
info@aceilluminations.com | 702.960.4249

cont. on 2