

ACE-PWR-DIM-160W



Job name:
Distributor:
Contractor:
Type:


TECHNICAL DATA	
Dimensions	4.13" Length * 2.13" Width * 2.05" Height
Operating temperature	-40°F to 140°F
IP Rating of driver	IP20
Weight	0.55LB
Humidity	20-95% RH, non-condensing
Vibration	10-500Hz, 2G
Standard Finish	White
Finishes available	Ivory and Black
Input voltage	120V
Frequency	60Hz
Power factor	0.99
Efficiency	91.0%
THD	≤10%
Max AC current	1.5A
Rated output voltage	24V
Rated output current	2 @ 3.33A
Rated power	160W
Voltage tolerance	±0.5V
Dimming range	0.3%- 100%
Application for use	Residential and commercial
Three way switching	Supports on/off control from two locations using the integrated dimmer and a separate compatible three-way switch.
Class	II & P
Protection	Short circuit, overload protection, overtemperature protection
Warranty	5 years



ACE-PWR-DIM-160W




DIMENSIONS

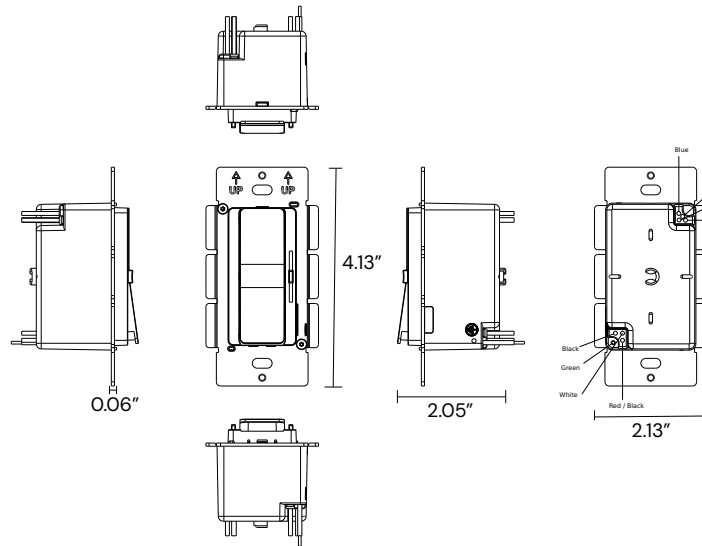

WIRING DIAGRAM

Input wires	L (Black), L1 (Red/Black), N (White), G (Green)
Output wires	V+ (Red), CW- (Gray/White), WW- (Yellow)

- Wiring diagram of **Class 2 Dimming** model for static LED with Class 2

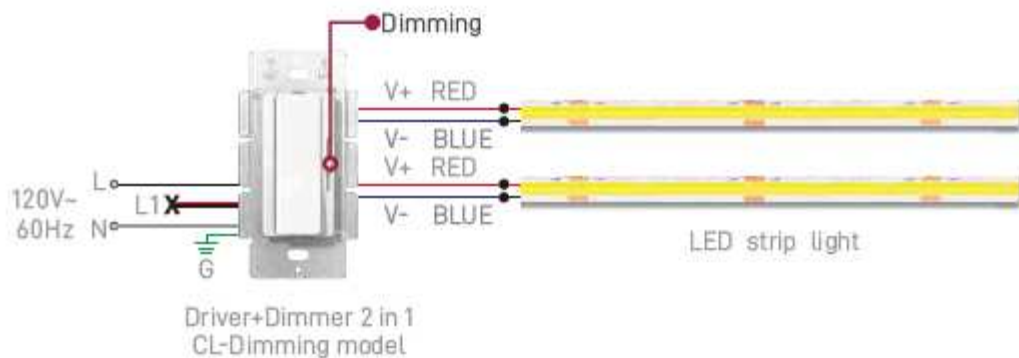

PART BUILDER

Select Product		Select Channel
ACE-PWR-DIM = ACE POWER DIM DRIVER COMBO	-	160W = 160 WATTS

FINALIZED PART NUMBER

ACE - PWR - DIM - 160W



rev 07/26

© 2026 Ace Illuminations. All rights reserved.
Specifications and content subject to change without notice. Protected by international copyright laws.
info@aceilluminations.com | 702.960.4249

cont. on 2