

BASILISK-RGBW-IP67



Job name:

Distributor:

Contractor:

Type:

TECHNICAL DATA

Dimension of single link	2.59" Width * 1.14" Height * 1.53" Length
Minimum bending radius	6.62"
Bend range for each link	30°
Operating temperature	-13°F to 122°F
IP Rating	IP67 Outdoor
Lumen maintenance	70,000 hrs L70 @ 77°F
Mounting	Mounting clip or adjustable clip
Power Lead	Not included, sold separately
Fixture whip included on fixture	In/out capabilities, 7" connection length (fixture to barrel connector)
Sizes available	13.11" - 6 links, 26.22" - 12 links, 39.37" - 18 links, 52.48" - 24 links
RGBW DMX Options	RGB30K, RGB40K, RGB60K
Surface clips included	14"= 2 clips, 27"= 3 clips, 40"= 4 clips, 53"= 5 clips
Lens options	Standard, Honeycomb, Shield
CRI	80+
Warranty	5 years
Input voltage	24V DC
Diodes per size	6 diodes - 13.11", 12 diodes - 26.22", 18 diodes - 39.37", 24 diodes - 52.48"
Plug and play	Yes
Beam Angles for RGBW	20°, 30°, 40°, 1015°, 1525°, 1540°
Dimming	DMX
Standard Finish	Black
IK rating	IK06
Material	Aluminum Shell + Tempered glass cover



rev 01/26

© 2026 Ace Illuminations. All rights reserved.

Specifications and content subject to change without notice. Protected by international copyright laws.
info@aceilluminations.com | 702.960.4249

cont. on 1


BASILISK-RGBW-IP67



ELECTRICAL		
LINKS SIZE W	CCT	MAX RUN W/ 96W
	RGB30K	
14" 6 LINKS 12W	428 LM/FT	8'
27" 12 LINKS 24W	963 LM/FT	
40" 18 LINKS 36W	1425 LM/FT	
53" 24 LINKS 48W	1892 LM/FT	

DIMENSIONS

LENGTH = 14" - 6 Links (12W)






LENGTH = 27" - 12 Links (24W)




LENGTH = 40" - 18 Links (36W)



LENGTH = 53" - 24 Links (48W)



OPTIC OPTIONS

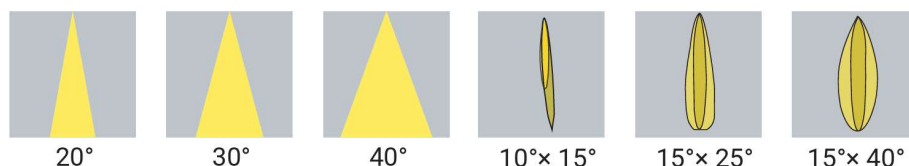

LENS OPTIONS



STANDARD

HONEYCOMB

SHIELD



rev 01/26

© 2026 Ace Illuminations. All rights reserved.

Specifications and content subject to change without notice. Protected by international copyright laws.
info@aceilluminations.com | 702.960.4249

cont. on 2

BASILISK-RGBW-IP67



PART BUILDER

Select Product	-	Select Size	-	Select CCT	-	Select Optic	-	Select Lens	-	Select Mounting	-	Select Length
BASILISK		14 = 14IN		RGB30K = RGB 3000K		20 = 20°		SD = STANDARD		MC = MOUNTING CLIPS		XXFT
		27 = 27IN		RGB35K = RGB3500K		30 = 30°		HC = HONEYCOMB		PVT = PIVOT CLIPS		
		40 = 40IN		RGB40K = RGB4000K		40 = 40°		SHLD = STD LENS W/ SIDE SHIELD ATTACHED				
		53 = 53IN				1015 = 10°X15°						
						1525 = 15°X25°						
						1545 = 15°X40°						

ACCESSORIES

LEADER CABLE:

(connects to basilisk)

BASILISK-AA-5W-LEAD-10FT

BASILISK ACCESSORY IP67 10 FOOT 5W LEADER CABLE FEMALE BARREL CONNECTOR TO BARE WIRE



TERMINATE THE END OF EACH RUN:

BASILISK-AA-5W-EC

BASILISK ACCESSORY IP67 SINGLE 5W MALE END CAP



MOUNTING:

(secure item onto structure)

BASILISK-AA-MC

BASILISK ACCESSORY SINGLE MOUNTING CLIP



BASILISK-AA-PVT

BASILISK ACCESSORY SINGLE ADJUSTABLE CLIP



ANTI-GLARE OPTIONS:

BASILISK-AA-LOUVER

BASILISK ACCESSORY SINGLE LOUVER



rev 01/26

© 2026 Ace Illuminations. All rights reserved.

Specifications and content subject to change without notice. Protected by international copyright laws.
info@aceilluminations.com | 702.960.4249

cont. on 3

BASILISK-RGBW-IP67



ACCESSORIES

DECODER:

(bridge the gap between basilisk and controller)

ACE-PWR-DMX-4C

ACE 100W 512 DMX DECODER 4 CHANNEL



ACE-PWR-DMX-4C-IP67

ACE 100W 512 DMX DECODER 4 CHANNEL IP67



DECODER/CONTROLLED HYBRID:

(provide simple control to the basilisk)

ACE-PWR-DMX-4C-BT

ACE 100W 512 DMX DECODER 4 CHANNEL BLUETOOTH - DOWNLOAD CASAMBI APP TO CONTROL



CONTROLLER:

(instructs the decoder on how the light should perform)

ACE-DMX-CTRL-3S

WALL MOUNT THREE SCENE, ONE UNIVERSE, DMX CONTROLLER




ACE-DMX-CTRL-3Z

WALL MOUNT THREE ZONE, ONE UNIVERSE, DMX CONTROLLER



ACE-DMX-CTRL-1

WALL MOUNT ONE ZONE, TWO UNIVERSE, DMX CONTROLLER



ACE-DMX-CTRL-10

WALL MOUNT 10 ZONE, ONE UNIVERSE, DMX CONTROLLER



POWER SUPPLIES:

(powers the basilisk)


ACE-PWR-36W

ACE 36W CLASS 2 POWER SUPPLY 120V-277V INPUT, 5 IN 1 DIMMING




ACE-PWR-96W

ACE 96W CLASS 2 POWER SUPPLY 120V-277V INPUT, 5 IN 1 DIMMING



ACE-PWR-192W

ACE 192W CLASS 2 POWER SUPPLY 120V-277V INPUT, 5 IN 1 DIMMING



rev 01/26

© 2026 Ace Illuminations. All rights reserved.

Specifications and content subject to change without notice. Protected by international copyright laws.
info@aceilluminations.com | 702.960.4249

cont. on 4