

MOONLIGHT FACADE-RGBW-IP67



Job name:

Distributor:

Contractor:

Type:

TECHNICAL DATA

Dimension of the fixture	1.18" Width * 2.64" Height
Minimum bending radius	Product is not flexible.
Operating temperature	-40°F to 131°F
IP Rating	IP67 Outdoor
Lumen maintenance	L70 > 54,000 hrs
Mounting available	Mounting clip
Power Lead	Not included, sold separately
Fixture whip included on fixture	In/out capabilities, 6" connection length (fixture to barrel connector)
Size of fixture whip included on fixture	20AWG
Rating of fixture whip included on fixture	IP67
Sizes available	1FT, 2FT, 4FT
RGBW Options	RGB2700K, RGB3000K, RGB3500K, RGB4000K
Mounting clips included	1 FT= 2 clips 2FT= 2 clips, 4FT= 2 clips
Lens options	Standard
CRI	90+
Warranty	5 years
Input voltage	24V DC
Diodes per size	14 diodes - 1FT , 30 diodes - 2FT, 60 diodes - 4FT
Plug and play	Yes
Beam Angle	120°
Dimming	DMX
Standard Finish	Black, Silver
IK rating	IK10
Material	Aluminum Shell + Tempered glass cover



rev 01/26

© 2026 Ace Illuminations. All rights reserved.

Specifications and content subject to change without notice. Protected by international copyright laws.
info@aceilluminations.com | 702.960.4249


cont. on 1

MOONLIGHT FACADE-RGBW-IP67



ELECTRICAL		
SIZE W	CCT	MAX RUN W/ 96W
	RGB30K	
1FT 3.5W	75 LM/FT	25'
2FT 7W	150 LM/FT	
4FT 14W	299 LM/FT	

DIMENSIONS

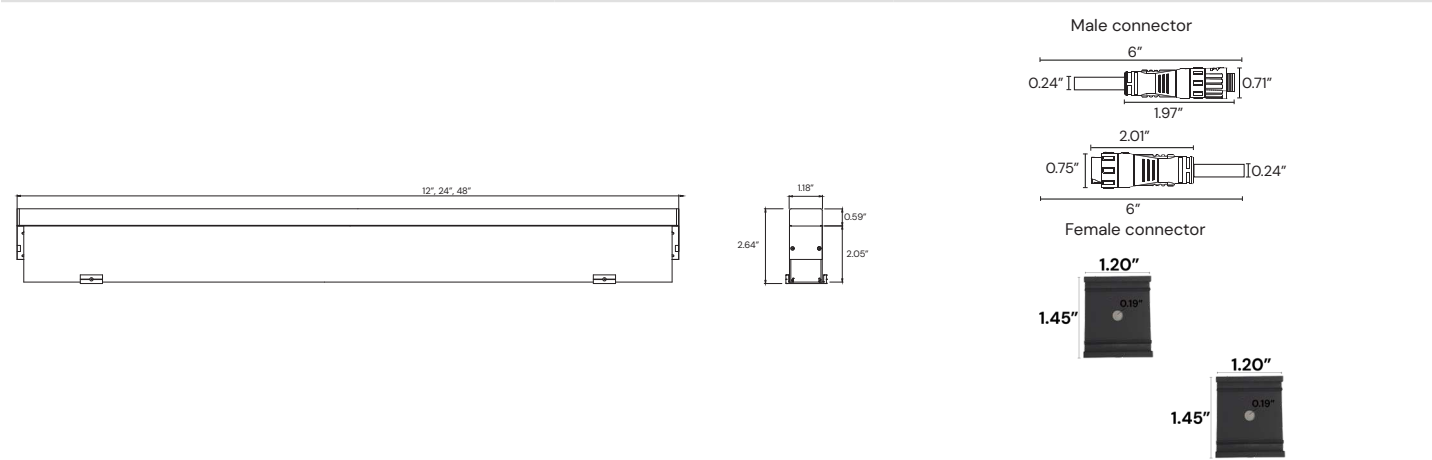

PART BUILDER

Select Product		Select Size		Select CCT
MLF	-	1 = 1FT	-	RGB27K = RGB2700K
		2 = 2FT		RGB30K = RGB3000K
		4 = 4FT		RGB35K = RGB3500K
				RGB40K = RGB4000K

FINALIZED PART NUMBER				
MLF	-	X	-	RGBXXK



MOONLIGHT FACADE-RGBW-IP67



ACCESSORIES (sold separately)

LEADER CABLE:

(connects to moonlight facade)

MLF-AA-5W-LEAD-10FT

MOONLIGHT FACADE ACCESSORY IP67 10 FOOT 2 WIRE LEADER CABLE FE-MALE BARREL CONNECTOR TO BARE WIRE



END CAP:

(to terminate the end of a run)

MLF-AA-5W-EC

MOONLIGHT FACADE ACCESSORY IP67 SINGLE 2W MALE END CAP



CONTROLLER:

(instructs the decoder on how the light should perform)

ACE-DMX-CTRL-3S

WALL MOUNT THREE SCENE, ONE UNIVERSE, DMX CONTROLLER



ACE-DMX-CTRL-3Z

WALL MOUNT THREE ZONE, ONE UNIVERSE, DMX CONTROLLER



ACE-DMX-CTRL-1

WALL MOUNT ONE ZONE, TWO UNIVERSE, DMX CONTROLLER



ACE-DMX-CTRL-10

WALL MOUNT 10 ZONE, ONE UNIVERSE, DMX CONTROLLER



POWER SUPPLIES:

(powers the moonlight facade)


ACE-PWR-36W

ACE 36W CLASS 2 POWER SUPPLY 120V-277V INPUT, 5 IN 1 DIMMING



ACE-PWR-96W

ACE 96W CLASS 2 POWER SUPPLY 120V-277V INPUT, 5 IN 1 DIMMING



ACE-PWR-192W

ACE 192W CLASS 2 POWER SUPPLY 120V-277V INPUT, 5 IN 1 DIMMING



rev 01/26

© 2026 Ace Illuminations. All rights reserved.

Specifications and content subject to change without notice. Protected by international copyright laws.

info@aceilluminations.com | 702.960.4249

cont. on 3