

ACE-A-RGBW-IP20



Job name:

Distributor:

Contractor:

Specifier:

Type:

TECHINCAL DETAILS

Dimensions of IP20 sheet	12" Width * 0.08" Height * 24" Length
Minimum bending radius	0.39"
Bend orientation	Vertical
Flexible	Yes
Operating temperature	-4°F to 113°F
IP Rating	IP20 Indoor
Lumens available	400LM/FT
RGBW options	RGB27K, RGB30K, RGB35K, RGB40K
Mounting included	3M VHB
Mounting not included	Screw into designated holes or stapled onto holes
Available sizes	12"x 24" rectangle
Power Lead	Sold separately
CRI (White LED only)	90+
Warranty	5 years
Input voltage	24V DC
Diodes per ft²	108
Field cuttable	Yes every 6"
Beam Angle	120°
Dimming	DMX 512
Binning	Single



rev 08/26

© 2026 Ace Illuminations. All rights reserved.

Specifications and content subject to change without notice. Protected by international copyright laws.
info@aceilluminations.com | 702.960.4249



cont. on 1

ACE-A-RGBW-IP20



ELECTRICAL						
OUTPUT WATTAGE	CCT				SIZE	MAX LOAD
	RGB 2700K	RGB 3000K	RGB 3500K	RGB 4000K		
~400 LM/FT² 30W/FT	395LM/FT	405LM/FT	410LM/FT	409LM/FT	1FT²	3FT²

DIMENSIONS

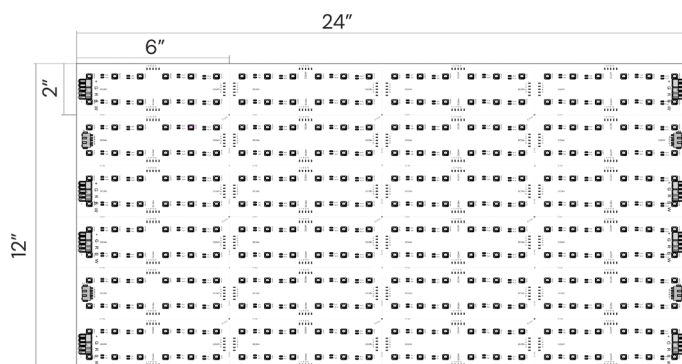

PART BUILDER

Select Product	-	Select Wattage	-	Select CCT	-	Select IP Rating	-	Select Length
ACE-A		30W = 30W/FT²		RGB27K = RGB2700K RGB30K = RGB3000K RGB35K = RGB3500K RGB40K = RGB4000K		IP20		XFT²

FINALIZED PART NUMBER						
ACE-A	-	30W	-	RGBXXK	-	IP20 - X = XFT²



rev 08/26

© 2026 Ace Illuminations. All rights reserved.
 Specifications and content subject to change without notice. Protected by international copyright laws.
 info@aceilluminations.com | 702.960.4249

cont. on 2

ACE-A-RGBW-IP20



ACCESSORIES (sold separately)

LEADER CABLE: (connects to sheet)

AA-T-5W-LEAD-CL ACE ACCESSORIES TAPE IP20 PRE-SOLDERED 22AWG 5 WIRE LEADER CABLE CUSTOM LENGTH

AA-T-A-5W-SNAPON-LEAD-6FT ACE ACCESSORIES IP20 A SERIES 5 WIRE 6FT SNAPON LEAD

JUMPER CABLE: (connects sheet to sheet)

AA-T-5W-JUMP-CL ACE ACCESSORIES TAPE IP20 PRE-SOLDERED 22AWG 5 WIRE JUMPER CABLE CUSTOM LENGTH

AA-T-A-5W-SNAPON-JUMP-2IN ACE ACCESSORIES IP20 A SERIES 5 WIRE 6IN SNAPON LEAD

DECODER: (bridge the gap between sheet and controller)

ACE-PWR-DMX-4C ACE 100W 512 DMX DECODER 4 CHANNEL

ACE-PWR-DMX-4C-IP67 ACE 100W 512 DMX DECODER 4 CHANNEL IP67

DECODER / CONTROLLED HYBRID: (provide simple control to the LED sheet)

ACE-PWR-DMX-4C-BT ACE 100W 512 DMX DECODER 4 CHANNEL BLUETOOTH - DOWNLOAD CASAMBI APP TO CONTROL

CONTROLLER: (instructs the decoder on how the light should perform)

ACE-DMX-CTRL-3S WALL MOUNT THREE SCENE, ONE UNIVERSE, DMX CONTROLLER

ACE-DMX-CTRL-3Z WALL MOUNT THREE ZONE, ONE UNIVERSE, DMX CONTROLLER



rev 08/26

© 2026 Ace Illuminations. All rights reserved.

Specifications and content subject to change without notice. Protected by international copyright laws.
info@aceilluminations.com | 702.960.4249

cont. on 3

ACE-A-RGBW-IP20



ACCESSORIES (sold separately)

CONTROLLER: (instructs the decoder on how the light should perform)

ACE-DMX-CTRL-1 WALL MOUNT ONE ZONE, TWO UNIVERSE, DMX CONTROLLER


ACE-DMX-CTRL-10 WALL MOUNT 10 ZONE, ONE UNIVERSE, DMX CONTROLLER

POWER SUPPLIES: (powers the sheets)

ACE-PWR-36W ACE 36W CLASS 2 POWER SUPPLY 120V-277V INPUT, 5 IN 1 DIMMING

ACE-PWR-96W ACE 96W CLASS 2 POWER SUPPLY 120V-277V INPUT, 5 IN 1 DIMMING

ACE-PWR-192W ACE 192W CLASS 2 POWER SUPPLY 120V-277V INPUT, 5 IN 1 DIMMING

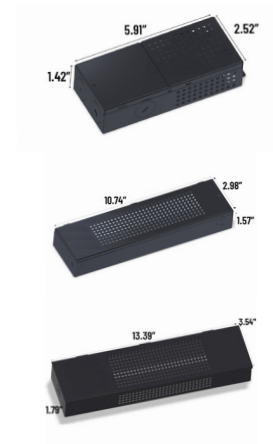

rev 08/26

© 2026 Ace Illuminations. All rights reserved.

Specifications and content subject to change without notice. Protected by international copyright laws.
info@aceilluminations.com | 702.960.4249

cont. on 4