
ACE-NV-MIC-SW-IP67

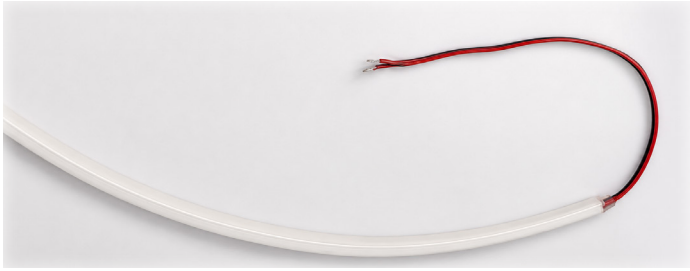

Job name:	
Distributor:	
Contractor:	
Type:	

TECHNICAL DATA	
Dimension for Static White	0.24" WIDTH * 0.24" HEIGHT
Minimum bending radius	1.97"
Bend orientation	Vertical
Operating temperature	-13°F to 140°F
IP Rating	IP67 Outdoor
Lumen maintenance (L70)	50,000 hrs
Neon Lead	Sold separately
Lumens available for Static White	100LM/FT
Static White Options	1700K, 2200K, 2400K, 2600K, 2800K, 3200K, 3800K, 4400K, 5600K
Mounting available (sold separately)	mounting clips and profiles
CRI	90+
Warranty	5 years
Input voltage	24V DC
Binning	Single
Field cuttable	No
Production intervals	every 0.98"
Beam Angle for Static White	120°
Dimming	ELV, TRIAC, 0-10V
Silicone finish	White
Material	Silicone

© 2026 Ace Illuminations. All rights reserved.
Specifications and content subject to change without notice. Protected by international copyright laws.
info@ace illuminations.com | 702.960.4249


cont. on 1

ACE-NV-MIC-SW-IP67


ELECTRICAL

WATTAGE	CCT									MAX CONT. RUN PER POWER FEED	TOTAL LOAD W/ 96W DRIVER
	1700K	2200K	2400K	2600K	2800K	3200K	3800K	4400K	5600K		
1.9W/FT	72LM/FT	99LM/FT	101LM/FT	103LM/FT	105LM/FT	107LM/FT	110LM/FT	108LM/FT	116LM/FT	16'	16'

DIMENSIONS

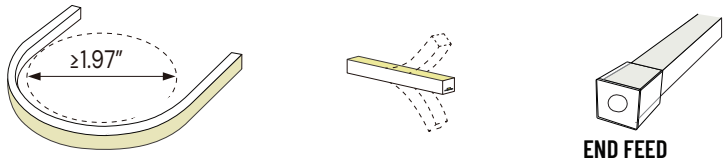

top view





side view

PART BUILDER

Select Product		Select Lumens		Select Feed		Select CCT		Select IP		Select Length
ACE NEON VERTICAL MICRO SERIES	-	100 = 100LM/FT	-	EF = END FEED	-	17K = 1700K	-	IP67	-	CLXX = CUSTOM LENGTH
						22K = 2200K				
						24K = 2400K				
						26K = 2600K				
						28K = 2800K				
						32K = 3200K				
						38K = 3800K				
						44K = 4400K				
						56K = 5600K				



FINALIZED PART NUMBER												
ACE-NV-MIC	-	100	-	EF	-	XXK	-	IP67	-	CLXX		

rev 07/26
© 2026 Ace Illuminations. All rights reserved.
Specifications and content subject to change without notice. Protected by international copyright laws.
info@ace illuminations.com | 702.960.4249

cont. on 2

ACE-NV-MIC-SW-IP67

ACCESSORIES (sold separately)

LEADER CABLE:	(connects to neon)	
AA-NV-MIC-2W-LEAD-CL	ACE ACCESSORIES NEON VERTICAL MICRO FACTORY SOLDERED 2 WIRE LEADER CABLE CUSTOM LENGTH	
JUMPER CABLE:	(connects neon to neon)	
AA-NV-MIC-2W-JUMP-CL	ACE ACCESSORIES NEON VERTICAL MICRO FACTORY SOLDERED 2 WIRE LEADER CABLE CUSTOM LENGTH	
END CAP:	(to terminate the end of a run)	
AA-NV-MIC-2W-EC	ACE ACCESSORIES NEON VERTICAL MICRO SINGLE 2W SILICONE END CAP	
POWER SUPPLIES:	(to power the neon)	
ACE-PWR-36W	ACE 36W CLASS 2 INDOOR & OUTDOOR POWER SUPPLY 120V-277V INPUT, 5 IN 1 DIMMING	
ACE-PWR-96W	ACE 96W CLASS 2 INDOOR & OUTDOOR POWER SUPPLY 120V-277V INPUT, 5 IN 1 DIMMING	
ACE-PWR-192W	ACE 192W CLASS 2 INDOOR & OUTDOOR POWER SUPPLY 120V-277V INPUT, 5 IN 1 DIMMING	
MOUNTING:	(secure the item onto structure)	
AA-NV-MIC-PRO-RC45-4FT	ACE ACCESSORIES NEON VERTICAL MICRO 4FT RECESSED 45° PROFILE	
AA-NV-MIC-MC	ACE ACCESSORIES NEON VERTICAL MICRO SINGLE MOUNTING CLIP	
AA-NV-MIC-PRO-4FT	ACE ACCESSORIES NEON VERTICAL MICRO 4FT PROFILE	

rev 07/26
© 2026 Ace Illuminations. All rights reserved.
Specifications and content subject to change without notice. Protected by international copyright laws.
info@ace illuminations.com | 702.960.4249

cont. on 3