



# ACE-K | STATIC WHITE OUTDOOR



ADHESIVE LISTED



PROJECT: \_\_\_\_\_

DISTRIBUTOR: \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_

TYPE \_\_\_\_\_

COMMENTS \_\_\_\_\_

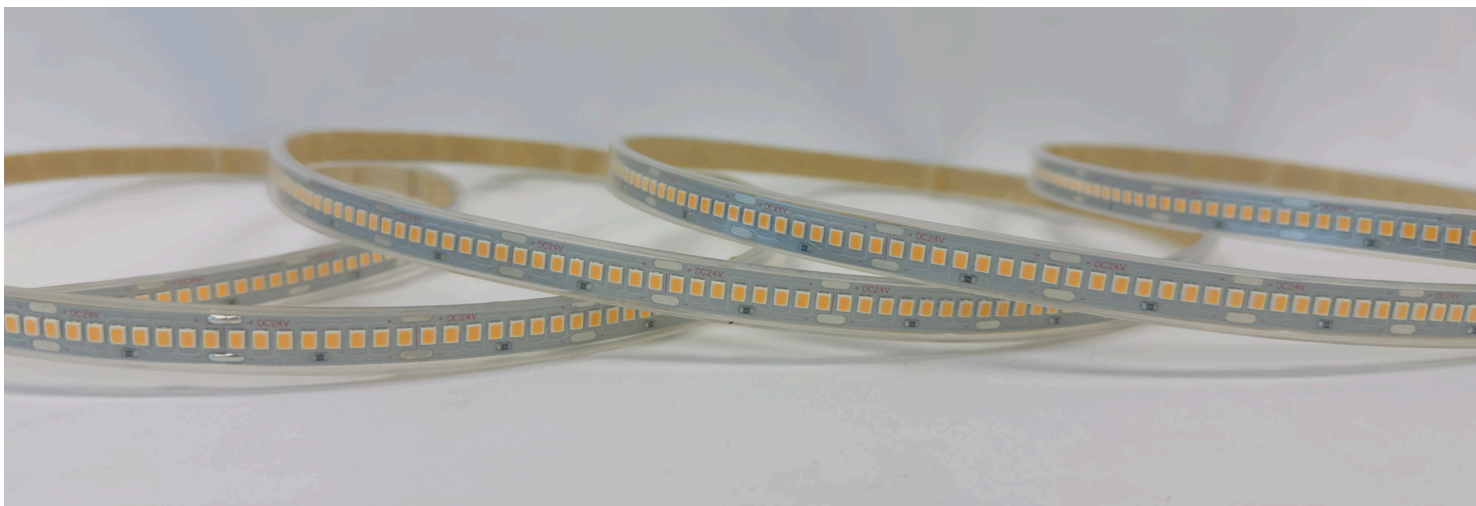

## PHYSICAL

DIMENSIONS	12.50mm (0.49") WIDTH *4mm (0.16") HEIGHT
OPERATING TEMPERATURE	-40°F (-40°C) TO 131°F (55°C)
IP RATING	IP65
MOUNTING	3M VHB TAPE OR PROFILE
LEAD TYPE	PRESOLDERED 6FT LEAD
PROFILE COMPATIBILITY	ALL ACE PROFILES EXCEPT MINI PROFILES
BEAM ANGLE	120°

## ORDERING INFORMATION

PRODUCT	INTENSITY	CCT	IP20	LENGTH
ACE-K	XXX	XXK	IP65	XXFT
ACE K SERIES	200 = 200LM/FT 400 = 400LM/FT 600 = 600LM/FT 800 = 800LM/FT 1000 = 1000LM/FT	27K = 2700K 30K = 3000K 35K = 3500K 40K = 4000K 50K = 5000K	IP65 = OUTDOOR	PROVIDE LENGTH

# ACE- K | STATIC WHITE OUTDOOR


## ELECTRICAL

OUTPUT	CCT (CORRELATED COLOR TEMPERATURE)					MAX RUN	WATTAGE	LM/ WATT	CUT INTERVALS	INPUT VOLTAGE
	2700K	3000K	3500K	4000K	5000K					
~200 LM/FT	222	226	229	231	234	40'	1.8w/FT	126	33mm (1.32")	24v DC
~400 LM/FT	383	388	395	399	401	30'	3.1w/FT	129		
~600 LM/FT	580	587	602	602	610	19'	4.9w/FT	106		
~800 LM/FT	802	811	834	838	840	13'	7.3w/FT	111		
~1000 LM/FT	1003	1009	1031	1039	1041	11'	8.54w/FT	118		

## PERFORMANCE

R9	90+
CRI	95+
LUMEN MAINTENANCE	60,000
BINNING	SINGLE
WARRANTY	5 YEARS

## ACCESSORIES (SOLD SEPARATELY)



### AA-T-2W-LEAD-1FT

ADDITIONAL 1FT 20AWG 2 WIRE LEADER CABLE FOR LEADS LONGER THAN 6FT



### AA-T-12MM-SMC

SILICONE PLASTIC CLIP  
(1 per ft is recommended)