

ACE-Z | STATIC WHITE Z



PROJECT:

DISTRIBUTOR:

CONTRACTOR:

TYPE

COMMENTS



SPECS

Dimensions of each module	1.28" WIDTH * 1.10" HEIGHT
Operating temperature	-40°F to 113°F
IP Rating	IP67 Outdoor
Pre-installed leader cable	10' (included)
Lumens/ft	800
CRI	90+
Binning	Single
Warranty	5 year
Input voltage	24V DC
Module per ft	6
Field cuttable	Yes per module
Beam Angle	20°, 30°, 40°, 30°x40°
Dimming	0-10V, ELV
Bend radius	Only horizontal, minimum bend radius 7.87"
Standard Finish	Black Finish

ORDERING INFORMATION

PRODUCT	INTENSITY	FEED	CCT	OPTIC	IP67	LENGTH
ACE-Z	800	XXX	XXK	XX	IP67	XXFT
ACE Z SERIES	800 = 800LM/FT	EF = END FEED BF = BOTTOM FEED SLF = SIDE LEFT FEED SRF = SIDE RIGHT FEED	27K = 2700K 30K = 3000K 40K = 4000K 60K = 6000K	20 = 20° 30 = 30° 40 = 40° 3040 = 30X40°	IP67 = OUTDOOR	PROVIDE LENGTH

ELECTRICAL

OPTIC	CCT (CORRELATED COLOR TEMPERATURE)				MAX CONT. RUN	MAX RUN W/96W	WATTAGE	CUT INTERVALS	INPUT VOLTAGE
	2700K	3000K	4000K	6000K					
20°	681	802	933	933	8'	8'	10.97W/FT	1.96"	24V DC
30°	692	814	957	957					
40°	627	738	869	869					
30X40°	593	695	768	768					

LEADER CABLE SOLD SEPARATELY (CONNECTS TAPE TO THE DRIVER)

AA-T-2W-LEAD-CL

ACE ACCESSORIES TAPE 2 WIRE LEADER CABLE CUSTOM LENGTH



JUMPER CABLE SOLD SEPARATELY (TO CONNECT TAPE TO TAPE)

AA-T-2W-JUMP-CL

ACE ACCESSORIES TAPE 2 WIRE JUMPER CABLE CUSTOM LENGTH



DRIVERS SOLD SEPARATELY (POWER UP THE PRODUCT)

ACE-PWR-36W


120V-277V INPUT, 5 IN 1 DIMMING 36W CLASS 2 POWER SUPPLY

ACE-PWR-96W

120V-277V INPUT, 5 IN 1 DIMMING 96W CLASS 2 POWER SUPPLY


ACE-PWR-192W

120V-277V INPUT, 5 IN 1 DIMMING 192W CLASS 2 POWER SUPPLY

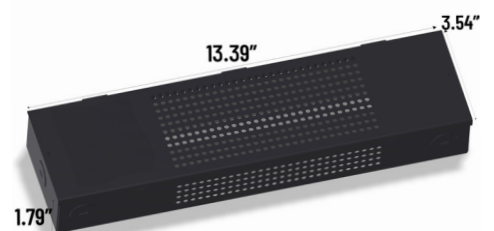

MOUNTING OPTIONS SOLD SEPARATELY (SECURE ITEM ONTO STRUCTURE)

AA-T-Z-MC	ACE MOUNTING CLIP
AA-T-Z-FLX-PRO-4FT	ACE FLEXIBLE 4FT PROFILE

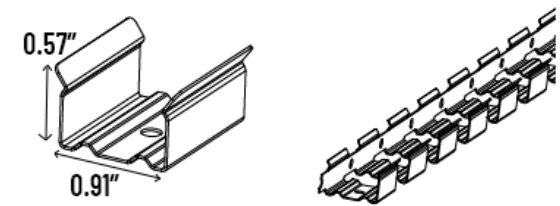

GLARE CONTROL ACCESSORIES SOLD SEPARATELY

AA-T-Z-LOUVER-1FT	ACE 6 MODULE LOUVERS FOR 1 FOOT PIECE
-------------------	---------------------------------------



SEALING ACCESSORIES SOLD SEPARATELY (IF YOU CUT YOUR MODULE)

AA-T-Z-EC	ACE SINGLE SILICONE END CAP TO TERMINATE END OF FIXTURE (IF CUTTING PRODUCT)
AA-T-Z-EL	ACE SINGLE SILICONE END FEED FITTING
AA-T-Z-SLL	ACE SINGLE SILICONE SIDE LEFT LEAD FITTING
AA-T-Z-SRL	ACE SINGLE SILICONE SIDE RIGHT LEAD FITTING