

# ACE-PWR-96W | 96W DRIVER



PROJECT: \_\_\_\_\_

DISTRIBUTOR: \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_

TYPE \_\_\_\_\_

COMMENTS \_\_\_\_\_



## FEATURES

0-10V & Triac dimming in one driver	Overload protection
Flicker free , 0.1% dimming	Universal 120-347 VAC input

## SPECS

Dimensions	2.98 " width * 1.57" height* 10.74" depth
Operating temperature	-31°F to 122°F
IP rating of driver	IP66 without the enclosure paired with IP66 cable glands (by others)
Weight	0.88lb
Humidity	10-90% RH, (non-condensing)
Rated output power	96W
Dimming method	0-10V , Triac (ELV/MLV)
Standard finish	Black
Power supply type	Constant voltage
Purpose	Designed for line voltage operation and conversion down to 24 V DC
Application for use	Residential and commercial
Class	II
Warranty	5 years

## ELECTRICAL INPUT & OUTPUT

Input voltage range	120-277 VAC
Protection	Overcurrent protection, over-temperature, and short circuit
Nominal output voltage	24 V DC
Maximum output power	96W

# ACE-PWR-96W | 96W DRIVER


## DIMMING 0- 10 V

Dimming range	0.1%-100%
Behavior	Smooth linear dimming curve

## TRIAC (ELV/MLV)

Dimming range	5%-100%
Behavior	Minimum end varies by dimmer

## WIRING DIAGRAM FOR BASIC TAPE

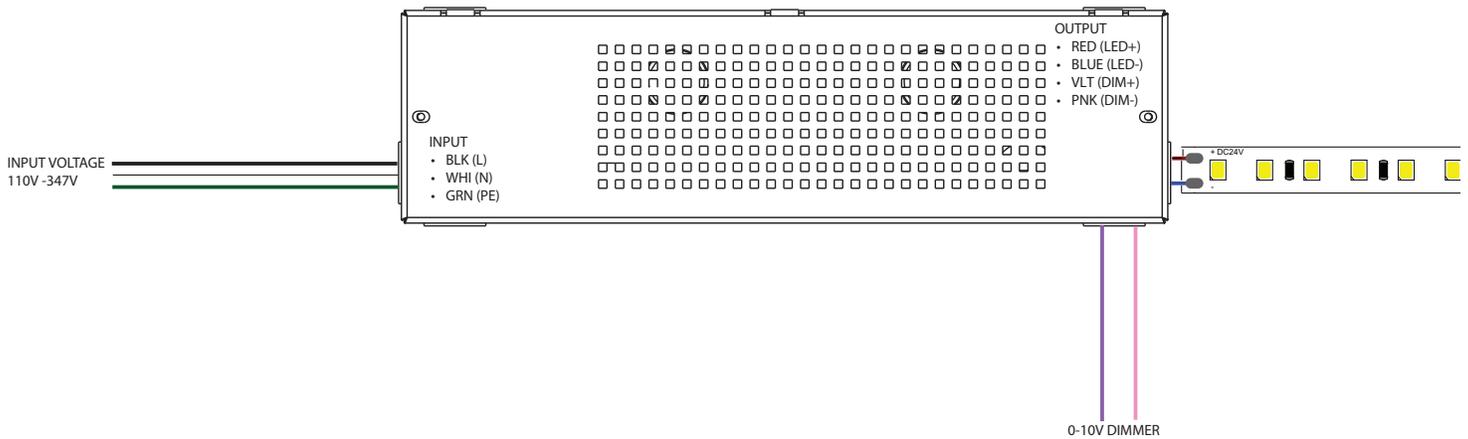

## ORDERING INFORMATION

PRODUCT	WATTAGE
ACE-PWR	96W
ACE-PWR = ACE POWER	96W = 96 WATTS