



ACE-J | STATIC WHITE OUTDOOR



ADHESIVE

LISTED


PROJECT: _____

DISTRIBUTOR: _____

CONTRACTOR: _____

TYPE _____

COMMENTS _____

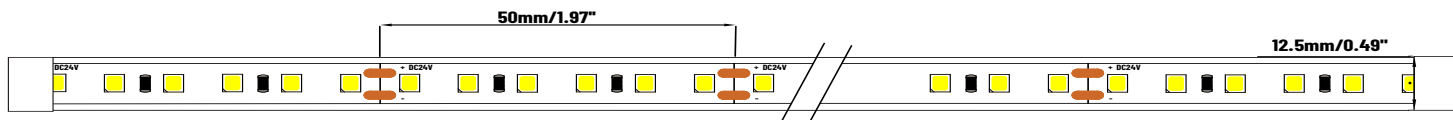

PHYSICAL

DIMENSIONS	12.5mm (0.49") WIDTH * 4mm (0.16") HEIGHT
OPERATING TEMPERATURE	-40°F (-40°C) TO 131°F (55°C)
IP RATING	IP65
MOUNTING	3M VHB TAPE OR PROFILE
LEAD TYPE	PRESOLDERED 6FT LEAD
PROFILE COMPATIBILITY	ALL ACE PROFILES EXCEPT MINI PROFILES
BEAM ANGLE	120°

ORDERING INFORMATION

PRODUCT	INTENSITY	CCT	IP20	LENGTH
ACE-J	XXX	XXK	IP65	XXFT
ACE J SERIES	200 = 200LM/FT 400 = 400LM/FT 600 = 600LM/FT 800 = 800LM/FT	27K = 2700K 30K = 3000K 35K = 3500K 40K = 4000K 50K = 5000K	IP65 = OUTDOOR	PROVIDE LENGTH

ACE-J | STATIC WHITE OUTDOOR


ELECTRICAL

OUTPUT	CCT (CORRELATED COLOR TEMPERATURE)					MAX RUN	WATTAGE	LM/ WATT	CUT INTERVALS	INPUT VOLTAGE
	2700K	3000K	3500K	4000K	5000K					
~200 LM/FT	190	198	209	214	218	40'	1.8w/FT	110	50mm (1.97")	24v DC
~400 LM/FT	391	400	413	420	419	30'	3.1w/FT	129		
~600 LM/FT	595	603	619	625	627	19'	4.9w/FT	123		
~800 LM/FT	789	797	815	822	820	14'	6.7w/FT	119		

PERFORMANCE

CRI	90+
LUMEN MAINTENANCE	50,000
BINNING	SINGLE
WARRANTY	5 YEARS

ACCESSORIES (SOLD SEPARATELY)



AA-T-2W-LEAD-1FT

ADDITIONAL 1FT 20AWG 2 WIRE LEADER CABLE FOR LEADS LONGER THAN 6FT



AA-T-12MM-SMC

SILICONE PLASTIC CLIP (1 per ft is recommended)